


# A NEW ARCHITECTURE FOR FIBER-OPTIC SUBSCRIBER ACCESS NETWORK AND EFFECT OF SEMICONDUCTOR OPTICAL AMPLIFIERS (SOAs) ON IT

by  
**A. Sakthivel**

TH  
CE/1998/m  
Sa217



DEPARTMENT OF ELECTRICAL ENGINEERING  
**INDIAN INSTITUTE OF TECHNOLOGY, KANPUR**

JULY, 1998

E  
998  
M  
AK  
IEW

A NEW ARCHITECTURE FOR FIBER-OPTIC  
SUBSCRIBER ACCESS NETWORK AND EFFECT  
OF SEMICONDUCTOR OPTICAL AMPLIFIERS  
(SOAs) ON IT

A Thesis Submitted  
in Partial Fulfillment of the Requirements  
for the degree of  
D.I.I.T

*by*  
A.Sakthivel


*to the*  
DEPARTMENT OF ELECTRICAL ENGINEERING  
INDIAN INSTITUTE OF TECHNOLOGY KANPUR  
July, 1998

21 SEP 1977  
CENTRAL LIBRARY  
IIT KANPUR  
No. A 126241

*Entered In System.*

EE-1990-M-SAK-NEW



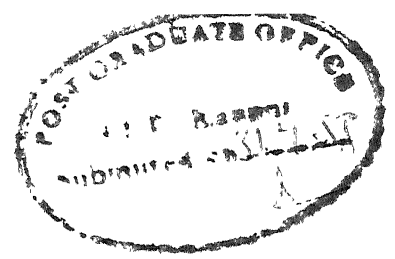

## CERTIFICATE

This is to certify that the thesis work entitled A New Architecture For Fiber-Optic Subscriber Access Network And Effect of Semiconductor Optical Amplifiers carried out by *A.Sakthivel*, Roll No. 9712405 has been carried out under my supervision and same has not been submitted elsewhere for a degree.

July,1998

  
Dr. Y.M. Singh,

Assistant Professor,

Dept.of.Electrical Engineering,  
Indian Institute of Technology.

Dedicated  
To  
My Beloved Parents  
and  
My Thesis Supervisor


## Acknowledgments

I express my sincere thanks to *Dr. Y. N Singh*, my thesis supervisor for his invaluable guidance and encouragement given to me through out my thesis. I am grateful to him for his suggestions and advises. He has always been very patient during the thesis work.

Thanks to *Venu* for helping me whenever I faced problems with computers. I am very thankful to *Ramana* and *Valibabu* for their help, innumerable comments and suggestions.

I express my gratitude to the Dept. of DOORDARSHAN , for providing me opportunity to pursue this P.G course

Last but not the least I wish to acknowledge the constant encouragement, support, blessings and guidance which my parents gave me.

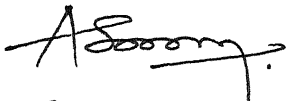  
(A. SAKTHIVEL)

## Abstract

Subscriber Access Networks (SAN) are used to connect central office and customer premises. In this thesis all-optical network SANs are considered. Many SAN architectures have already been proposed in the past. Here, a new architecture for the local loop is designed and proposed. The supportable number of users is computed with and without optical amplifier. The effect of gain saturation of the amplifier and the extinction ratio are also analyzed. The total cost per subscriber in the proposed architecture is less because the equipments and fiber costs are shared by many customers. The network is suitable for Gigabits transmission. The optical amplifiers play an important role in system upgradation. The semiconductor laser amplifiers (SLA) are used in the network to increase the supportability. In the network, not only supportable number of users are increased by using OAs but also the transmission distance.

# Contents

1	Introduction	1
1.1	Subscriber Access Network . . . . .	2
1.2	Topologies . . . . .	3
1.2.1	Bus Topology . . . . .	4
1.2.2	Ring Topology . . . . .	5
1.2.3	Star Topology . . . . .	6
1.3	Local access network systems . . . . .	7
1.3.1	Totally Transparent Optical Subscriber System (TTOSS) . . . . .	7
1.3.2	Telephony Passive Optical Network (TPON) . . . . .	8
1.3.3	Passive Photonic Loop (PPL) . . . . .	9
2	System Architecture	11



# Contents

1	Introduction	1
1.1	Subscriber Access Network . . . . .	2
1.2	Topologies . . . . .	3
1.2.1	Bus Topology . . . . .	4
1.2.2	Ring Topology . . . . .	5
1.2.3	Star Topology . . . . .	6
1.3	Local access network systems . . . . .	7
1.3.1	Totally Transparent Optical Subscriber System (TTOSS) . . . . .	7
1.3.2	Telephony Passive Optical Network (TPON) . . . . .	8
1.3.3	Passive Photonic Loop (PPL) . . . . .	9
2	System Architecture	11


2.1	Network Configuration . . . . .	11
2.2	Devices used . . . . .	14
2.2.1	Optical Add-Drop Multiplexer . . . . .	14
2.2.2	Wavelength division multiplexer (WDM) . . . . .	14
2.2.3	Star Coupler . . . . .	15
2.3	Advantages . . . . .	15
3	System Analysis	17
3.1	Power Budget Analysis . . . . .	17
3.2	Computation of Supportability . . . . .	20
4	System Upgradation by Using Optical Amplifiers	22
4.1	Amplifier Model . . . . .	23
4.2	Network with Unsaturated amplifier . . . . .	25
4.3	Network with Average gain Saturated amplifier . . . . .	26
5	Example	28
6	Conclusions	64

# Chapter 1

## Introduction

The application of optical technology to the local network has been a field of increasing interest and debate over the past few years. In the past it has usually been assumed that optical networks will penetrate to small business and residential customers only if new wide-band services are provided that will gain extra revenue to offset the additional costs involved in the provision of optical technology but the revenue is uncertain and it is very difficult to pre-estimate the demands. To tackle this problem networks must be designed in such way that they should not give much economic burden and are compatible with existing services.

The local loop or subscriber access network which lies between the central office and a subscriber location is a part of the telephone plant and is considered mainly a twisted pair copper cable. The subscriber loop has undergone many changes over the past few years. Today stage is set for cost effective extension of fiber to the subscriber. One of the challenges in providing cost effective subscriber loop transmission systems is to develop low cost optical source and detector compatible with high volume manufacturing environment. In this chapter, a general structure of the local network and the major options are described. Some examples of the local access network are also given.

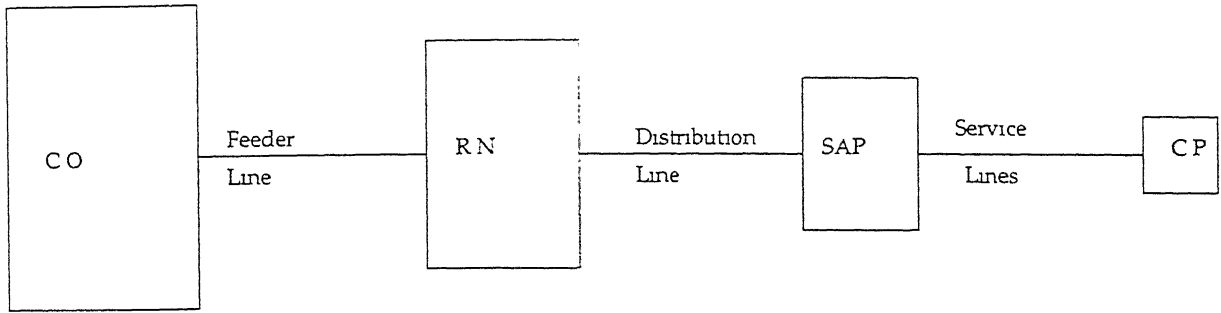

C O Central office      R N Remote Nodes      S A P Service Access Point      C P Customer Premises

Figure 1.1: Subscriber Access Network Model

## 1.1 Subscriber Access Network

Subscriber access network is an all-optical network which connects customers to a central or switching office (CO). Communication link is made between two subscribers via exchange and the telecommunication network. The traffic flow control and management (administration) is done by the exchange. The feeder, distribution, and service cables may be totally fiber-based; however near-term economic considerations may call for deploying fiber only upto the SAP and using Copper (wire pairs or coax) for the service segment [8]. The enhanced bandwidth offered by optical fiber will allow the use of subscriber access networks to provide wide-band services (videophone, HDTV, Video on demand, Digital audio and video, facsimile, data etc) to the subscriber together with the narrow band services.

Each segment of the subscriber access network (feeder, distribution, service) may have different physical topology, which refers to certain physical attributes of that segment.

## 1.2 Topologies

The manner in which nodes are geometrically arranged and connected is known as the topology of the network. There can be physical as well as logical topologies. *Physical topology* is the physical interconnection pattern while the *Logical topology* is the pattern in which information flows [8]

There are three major classes of topologies: *bus*, *ring* and *star*. Each of these topologies has its own particular advantages and limitations in terms of reliability, expandability, and performance characteristics.

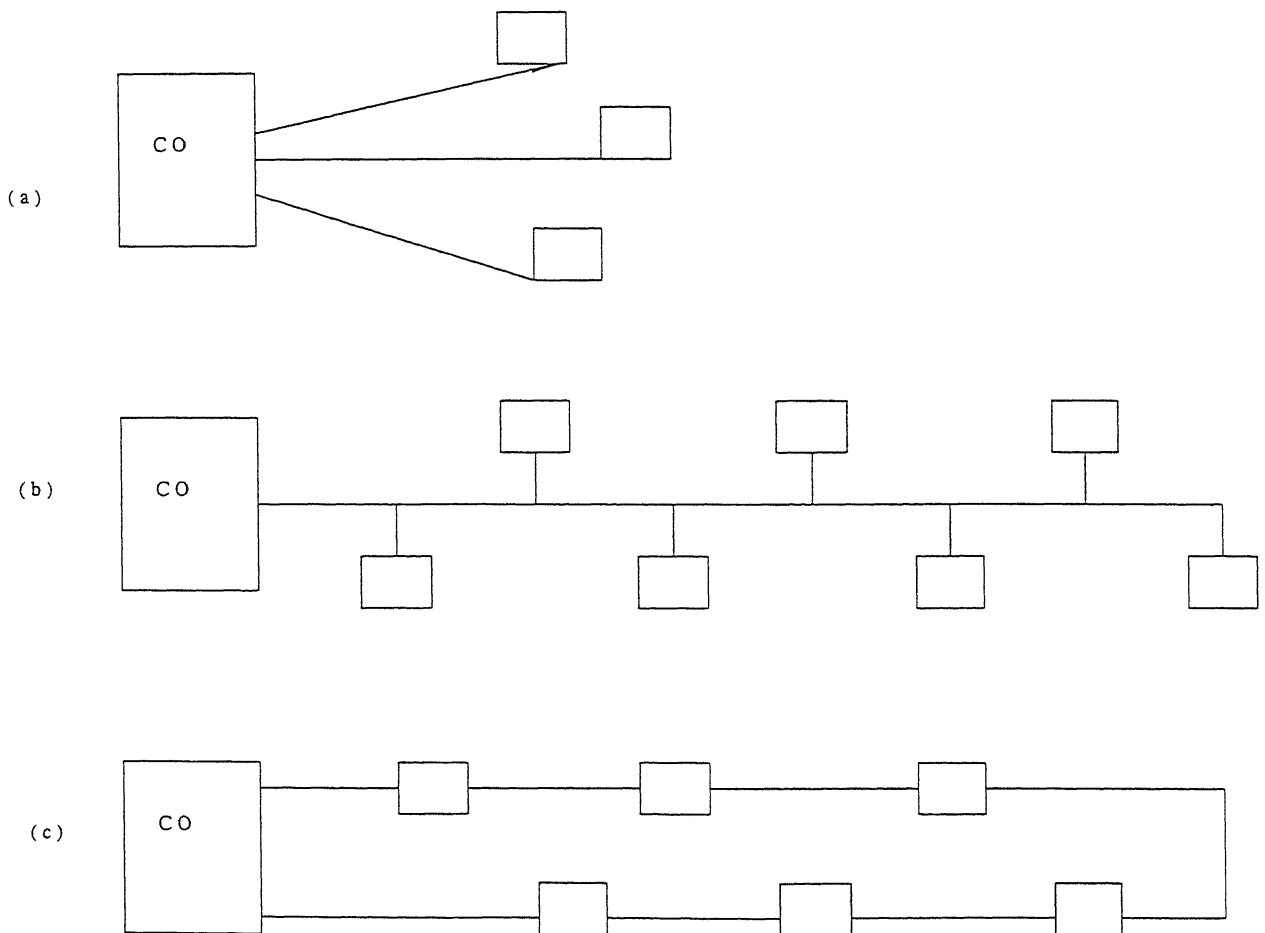


Figure 1.2: Topologies:(a) Star (b) Bus (c) Ring

Many factors must be considered in comparing the topological alternative for the various segments of the loop. These factors include initial cost, life cycle cost, available technology, evolvability to future network architectures, flexibility in providing future services, network reliability and maintainability and customer concerns regarding privacy and security.

### 1.2.1 Bus Topology

The bus topology is shown in figure 1.2 (b). In a bus topology all the network nodes are connected to a common transmission medium. Each network node has a unique address which is used when information is transmitted. When a message is sent it propagates throughout the medium and is received by all the users. To receive messages, each user continuously monitors the medium and copies those messages that are addressed to it as the messages go by.

Since the transmission medium in a bus is generally time-shared and broadcast in nature there must be some type of control mechanism to prevent several users from transmitting simultaneously. These mechanisms are generally classified as *polling* or *contention* techniques (random access).

#### Advantages

- Cable runs are shorter than in other topologies
- Ideally suited for use with high performance contention protocols.
- The station can be added or removed without disturbing the other stations. Suitable media access techniques can also be used, which are unaffected by addition or deletion of station.

- Failure of any station does not affect the operation of the other stations. The fiber cable used as a transmission media is highly reliable and usually doesn't fail. Consequently a network has very high reliability.

## Disadvantages

- Transmission distance is restricted because optical power at a particular user's receiver decreases with increasing distance. Thus an important parameter of interest is the maximum optical power range (dynamic range) to which any receiver must be able to respond. The smallest difference in transmitted and received optical power occurs for adjacent users. The largest difference in transmitted and received optical power occurs between the first user and the farthest one. restrictions
- Access to an optical fiber is achieved by means of coupling (tapping). Insertion and output losses at each tap plus the fiber losses between taps limit the network size to a small number of users.

### 1.2.2 Ring Topology

The ring topology is shown in figure 1.2 (c). In this topology consecutive nodes are connected by point-to-point links which are arranged to form a single closed path. The merits and demerits of the topology are as follows

- rings must be physically arranged so that all nodes are fully connected
- whenever a node is added to support new services, transmission lines have to be placed between this node and its two nearby, topologically adjacent nodes. This addition or deletion of node disturbs operation of the network unlike the bus

- Break in any link, failure of any node will disrupt network operation. Therefore network will be much less reliable than the bus. As all the nodes must be kept ON for network operation, this topology is generally used as backbone.
- higher speed interfaces are desirable so that fiber bandwidth can be used to full extent
- fault sectionalization is more difficult as the whole network becomes nonoperational unlike bus or star whenever fault occurs
- low reliability because the network is insecure like the bus as the information is broadcast. But the communication can be interrupted by intermediate node because broadcast is achieved by relaying the information. This is also one of the reasons why this topology is preferred in backbone.

### 1.2.3 Star Topology

In star topology dedicated fibers are used to connect each subscriber. The advantages and disadvantages of this topology are as follows:

- Amount of cable required is considerably increased over the ring or the bus network.
- Simple user equipment is adequate as dynamic range of receiver need not be as large as needed in bus topology.
- Network expansion is limited due to fixed dimension of star coupler
- More bandwidth is available as compare to ring topology
- Sectionalization of faults is easy
- High reliability as node failures does not effect the connectivity.



- high degree of security and limit unauthorized access due to dedicated fiber facility but result in a higher initial cost. However, when the distances are short then the initial cost is immaterial.

## 1.3 Local access network systems

Several fiber based local access network systems are described as examples to illustrate the architectural concepts described above

### 1.3.1 Totally Transparent Optical Subscriber System (TTOSS)

The totally transparent optical subscriber system is shown in figure 1.3. It is a single star topology used between CO and CP. Thus, dedicated fibers required between CO and each customer. Two fibers can be provided to each customer. One for each direction of transmission or both directions of transmission can be carried over a single fiber using an optical duplexer to separate the downstream wavelengths from the upstream wavelengths [11]. WDM techniques are used to provide multiple optical channels to each customer in the TTOSS system. The major advantages are :

- ease upgradation of the system.
- high reliability and low maintainence
- privacy and security.

### 1.3.2 Telephony Passive Optical Network (TPON)

The telephony passive optical network is shown in figure 1.4. It is a physical star and logical bus topology used in the feeder, distribution and service segments of the local access network, which uses a broadcast mechanism for communication [12]. In TPON the customer security and privacy are needed encryption and time slot hopping can also be used. An optical

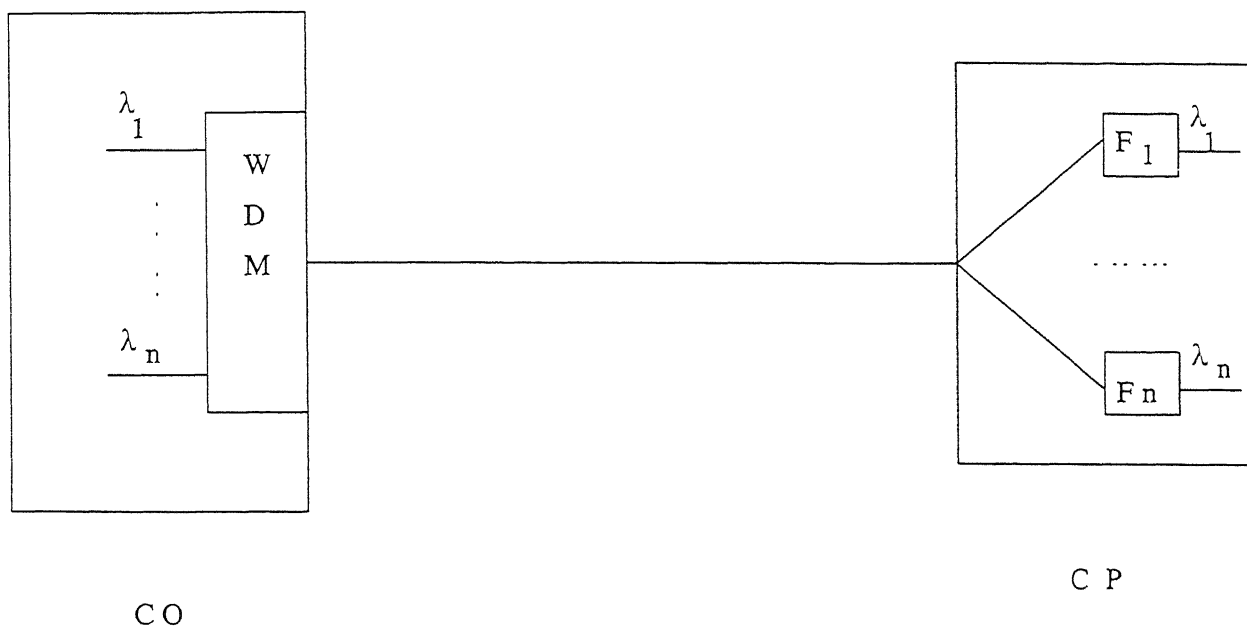


Figure 1.3 Totally transparent optical subscriber system

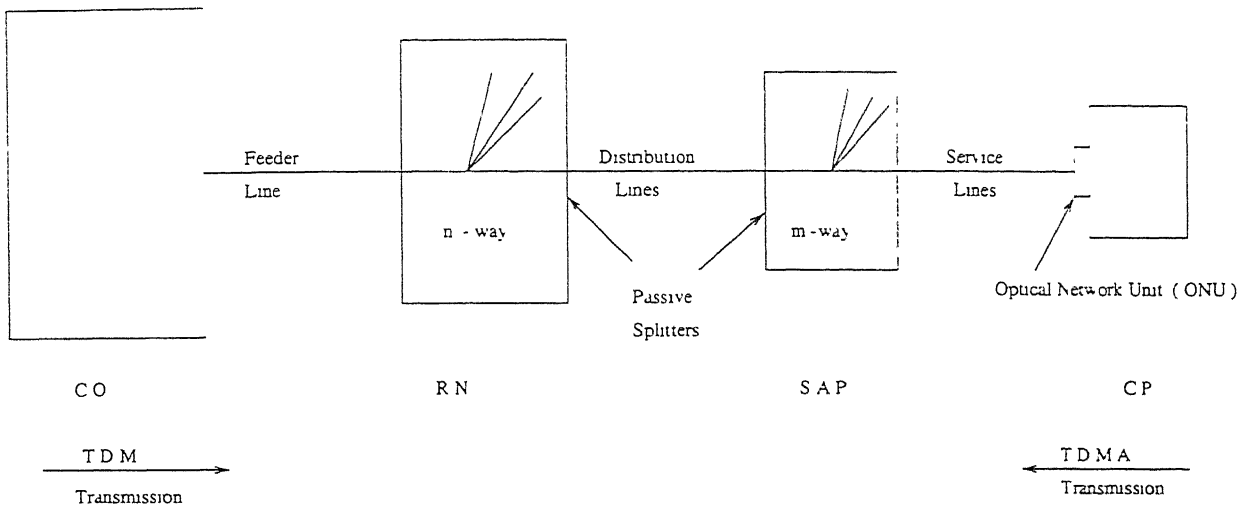


Figure 1 4 Telephony passive optical network

filter that passes only the TPON system wavelength is built into the ONU. This enables wavelengths to be added at a latter date to provide new services without disturbing the existing telephony and ISDN services. These new services can use FDM, TDM or ATM multiplexing techniques [12]. To maintain the same bit error rate, the higher bandwidth required for broad band services requires a higher signal-to-noise ratio as they use large bandwidth. Evolution from TPON to BPON may require the addition of fibers in the feeder segment to bypass some of the multistage splitters.

### 1.3.3 Passive Photonic Loop (PPL)

Passive Photonic Loop system is shown in figure(1 5). It is a double-star network and uses *dense* WDM techniques to provide each customer with a dedicated downstream wavelength and a dedicated upstream wavelength [10]. Here *dense* means that large number of wavelengths are used within narrow spectrum. A grating based dense WDM device can support upto 50 wavelengths [9].

The PPL system allows sharing of the fiber by several customers. Dense WDM is

used between the CO and RN or SAP to allow sharing of the single feeder fiber. Dedicated optical fiber links connect the RN or SAP to CP

Thus, PPL has a physical star and logical star topology in both the feeder and the service segments of the local access network. In PPL the Dense WDM devices at the SAP rather than the RN would increase not only the sharing of fiber, but also increases the number of equipment locations that must be administered [13,10]

Very narrow line widths are required for dense WDM systems. Therefore distributed feedback (DFB) laser transmitters are necessary [10]. Basic PPL design can be combined with a broadcast overlay for upgradation. Several broadcast signals may be multiplexed at the CO using FDM, WDM, TDM or ATM techniques and transmitted to the RN, where passive power splitters split the signal for delivery to the customers.

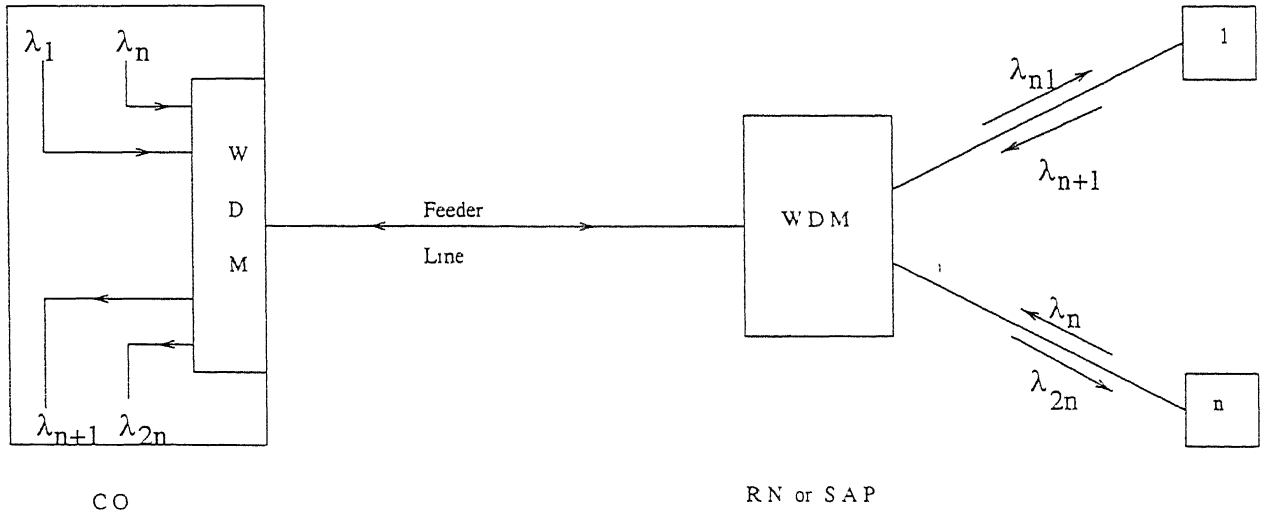


Figure 1.5 Passive photonic loop

In the following chapters a new subscriber access network architecture is proposed and analysed. This network may result in low installation cost and maintenance cost. It is high capacity, symmetrical, and two-way broadband service network. The overall cost per customer will be less because most of the equipments and fiber cost are shared by groups of customers.

# Chapter 2

## System Architecture

In this chapter a new fiber-optic subscriber access network architecture is proposed. It is more suitable for high capacity transmission of the order of gigabits per seconds. Time division multiplexing (TDM) with reservation access technique is used to avoid collision in both upstream and downstream direction. It is a symmetric service system. The key components such as wavelength division multiplexing (WDM) device, optical add-drop multiplexer (OADM) devices and Star coupler (SC) are used with wavelength *reuse technique*.

### 2.1 Network Configuration

The new architecture shown in figure(2.1) is a combination of a bus and star topology. Basically, it is considered as a physical bus and a logical star network. The architecture has two buses, one for downstream transmission and one for upstream transmission. Both the buses carry multiple wavelengths. There are OADM devices on each bus. For downstream transmission OADM drops the wavelengths at various locations [14]. There are N such OADM devices on each bus. As shown in figure(2.1) the dropped signal is fed to a star

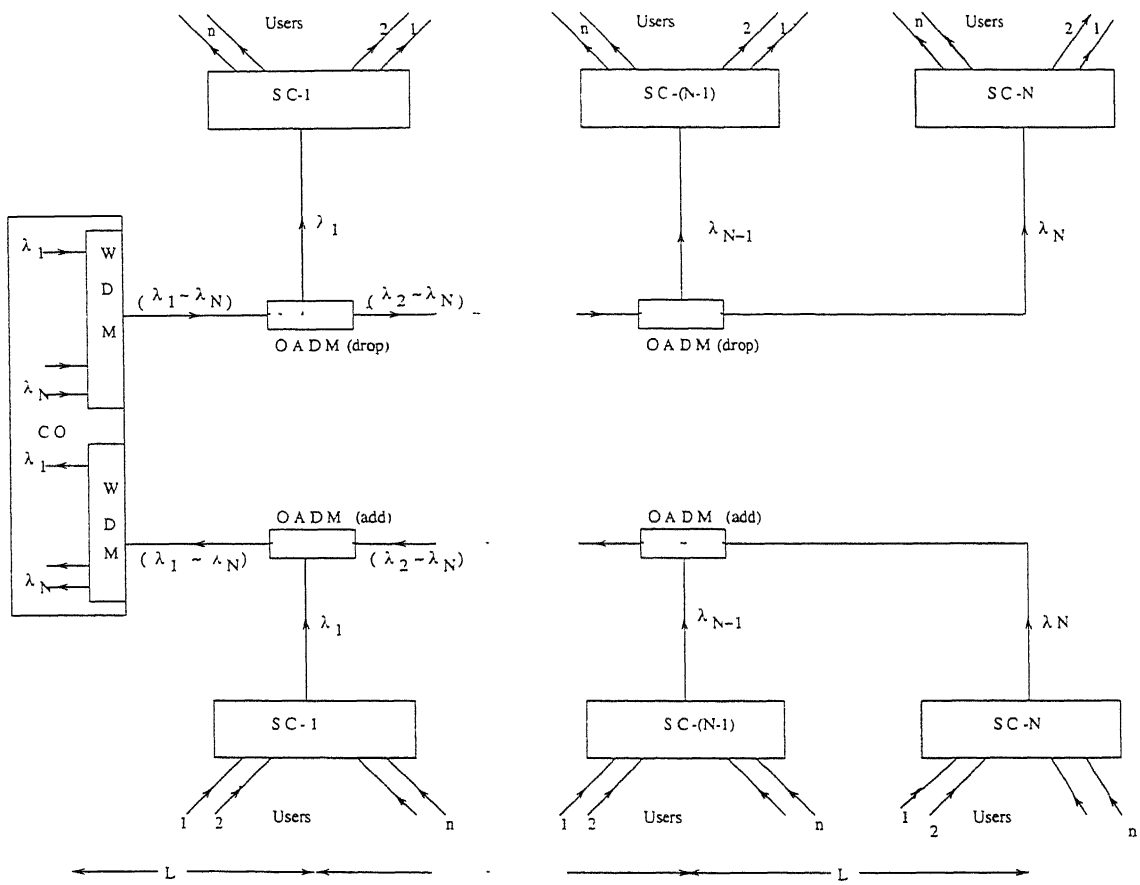


Figure 2 1: Configuration of new architecture

coupler, which splits it. The splitted signal is distributed to the subscribers connected to star coupler through a dedicated fiber. Each of these star coupler supports  $n$  subscribers. The  $n$  subscribers form a group.

A specific wavelength is preassigned to each group and the same wavelength is dropped from a set of wavelengths in the bus.

The signal on this wavelength is equally distributed to all  $n$  users through a star coupler(SC). The same wavelength is used by the same  $n$  subscribers in the group for upstream transmission. Thus, the same wavelength used by a group of  $n$  users in both upstream and downstream direction procedure is called *wavelength reuse* scheme [14].

In a single bus or ring network where adding and dropping of a signal of the same wavelength takes place simultaneously the interference beat noise affects the receiver sensitivity more severely compared to the wavelength not-reuse scheme.

In this topology, the total number of users,  $N_u$ , can increase as  $2^i n$  where  $i$  is an integer and  $n$  is the number of users per group(branch). There are  $N$  number of branches and hence the number of channels are assumed to be  $N$ .

The maximum number of users,  $n_{max}$ , in a group is limited by the nature of service and the minimum bandwidth required for that service by individual user. For example if  $B$  is the bit rate in bits/sec then the maximum number of user per group is equal to  $B$  divided by the minimum bandwidth needed by each customer. Once the maximum number of users is fixed, then the network size is limited by the various losses between transmitter and receiver since the optical power available at a particular user's receiver decreases with increasing distance from the source.

## 2.2 Devices used

The key components used in this network are wavelength division multiplexer (WDM), Optical Add-Drop multiplexer (OADM) and Star Coupler(SC)

### 2.2.1 Optical Add-Drop Multiplexer

Mach-Zehnder interferometers with fiber Bragg grating (MZ-FG) have been investigated as promising devices for wavelength selectable optical add-drop multiplexers (OADM) [14]. The optical add-drop multiplexer is expected to play an important role enabling greater connectivity and flexibility in WDM networks. Cascaded MZ-FG's have been fabricated to show that the interferometric crosstalk can be successfully reduced to  $-50\text{ dB}$  for the add signal, and  $-71\text{ dB}$  for the drop signal, respectively. Individual MZ-FG has reflection of  $3\text{ dB}$  and  $20\text{ dB}$  for corresponding reflection bandwidths  $0.8$  and  $1.5\text{ nm}$  respectively. The insertion loss is  $0.7\text{ dB}$  for dropping, and  $0.50\text{ dB}$  for adding. The crosstalk-free bandwidth of  $0.6\text{ nm}$  was also obtained with the cross talk of less than  $-35\text{ dB}$ . No *BER* degradation was observed in both add and drop performances [14]

### 2.2.2 Wavelength division multiplexer (WDM)

Arrayed-waveguide grating (AWG) multiplexers/demultiplexers are key components in wavelength division multiplexing transmission systems and networks. The crosstalk of an arrayed-waveguide grating multiplexer/demultiplexers was reduced by employing a phase compensating plate developed for static phase control. Experimental results showed as low crosstalk as  $-37\text{ dB}$  and  $-39\text{ dB}$  for the TE and TM modes respectively. It is also reported that the insertion loss is less than  $1\text{ dB}$  and the device is polarization independent. The channel spacing is  $0.8\text{ nm}$  in  $1.55\text{ }\mu\text{m}$  band ( $100\text{ GHz}$ ) [15].



### 2.2.3 Star Coupler

Star Couplers are generally used for distributing a single input signal to multiple outputs

Assume a  $1 \times n$  splitter or  $n \times 1$  combiner made of 3 dB  $2 \times 2$  couplers. The signal passing through it must transverse  $\log_2 n$  couplers. If  $L_d$  is insertion loss of a single 3 dB  $2 \times 2$  coupler then, total insertion loss is  $L_d \log_2 n$  and the splitting /combing loss  $10 \log_{10} n$ . Thus the total loss due to SC is the sum of the insertion loss and splitting loss

## 2.3 Advantages

The proposed architecture of local access network has the following features.

- Amount of fiber used in the feeder and distributive segments are less
- There is no active devices in the loop
- Initial cost is less since the equipment and fiber cost are shared by a group of users
- It is easy to reconfigure the network(add and remove users) without disturbing other users as the OADMs are used
- Network expansion is straightforward and increases the maximum potential bandwidth of network. Therefore it provides the maximum flexibility in service provisioning and in future upgradation
- The administration of bandwidth requirements for individual customers and the sectionalization of faults are simplified considerably
- The star coupler is placed near the customer premises so that the length of the dedicated lines is reduced thereby reducing the cost.

- The number of users supported by this network is large as compared to any other subscriber access network

# Chapter 3

## System Analysis

The optical power budget for a system is given by the following expression:

$$P_T = P_R + L + M_a \text{ dB} \quad (3.1)$$

where  $P_T$  is the average optical power transmitted,  $P_R$  the average optical power required at the receiver and  $L$  the total channel loss. The safety margin  $M_a$  is to include in the power budget to avoid unacceptable decrease in system performance due to small variations in the system parameters

### 3.1 Power Budget Analysis

The system model for Powerbudget analysis is shown in figure(3.1) To determine the supportable number of users for the given transmitter power and bit error rate ( $BER$ ) it is assumed that all the users in a group are at equal distance from the access point (SC). The branches are equally spaced and equal to the number of wavelengths

The following symbols are used in the analysis:

- transmitter optical power per channel,  $P_T$ ,  $dBm$
- optical power received at branch  $P_{bk}$ ,  $dBm$ . where  $k = 1, 2, 3, \dots, N$
- single splice loss,  $L_s$ ,  $dB$
- fiber attenuation  $\alpha$ ,  $dB/km$
- fiber loss.  $L_f$ ,  $dB$
- insertion loss of WDM,  $L_w$ ,  $dB$
- insertion loss for dropping signal in ADM,  $L_{13}$ ,  $dB$
- insertion loss for adding signal in ADM,  $L_{12}$ ,  $dB$
- insertion loss of single  $3\text{ dB } 2 \times 2$  coupler,  $L_d$ ,  $dB$
- distance between branches,  $L$ ,  $km$
- total number of branches which is equal to number of wavelengths,  $N$
- number of users per branch.  $n$

Power received at branch-1,  $P_{b1}$ , is given by

$$P_{b1} = P_T - L_w - 4 L_{sp} - L_{12} - \alpha L. \quad ($$

power received at branch-2

$$P_{b2} = P_T - L_w - 6 L_{sp} - L_{13} - 2 \alpha L. \quad ($$

and power at branch-3

$$P_{b3} = P_T - L_w - 8 L_{sp} - 2 L_{13} - L_{12} - 3 \alpha L \quad ($$

and so on. Hence the power available at branch- $N$  is given by.

$$P_{bN} = P_T - L_w - 2 (N + 1) L_{sp} - (N - 1) L_{13} - L_{12} - N \alpha L. \quad ($$

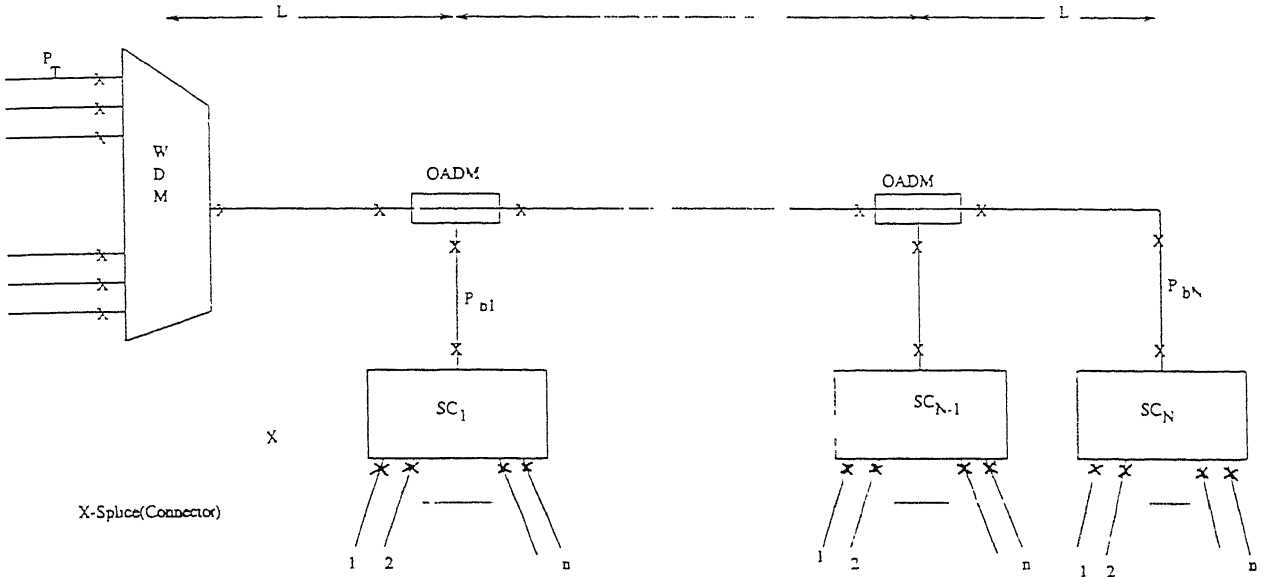


Figure 3.1 System model

At the branch- $N$  the power received is minimum and the total loss between the transmitter and receiver is maximum. Therefore, it is considered as the worst case for the analysis. The power received at each branch is equally divided among the  $n$  users through a star coupler (SC).

The optical power available at a receiver is equal to the optical power available at the branch minus the coupler losses. The minimum optical power required at the receiver is equivalent to its sensitivity in order to maintain a particular  $BER$  for given bit rate. The receiver sensitivity is defined as the minimum optical input power (measured in  $dBm$ ) for which the  $BER$  measured at the receiver is  $10^{-9}$  [7].

For bit rates between  $10\text{ Mb/s}$  and  $2.5\text{ Gb/s}$  and over the wavelength range of  $0.8 - 1.6\text{ }\mu m$  the best optical receivers require a flux of  $300 - 1000$  photons per bit corresponding to a sensitivity of

$$P_R = 2 \times 10^{-13} B \text{ mW} \quad (3.6)$$

where  $B$  is the bit rate in bits/sec per channel [6].

### 3.2 Computation of Supportability

The maximum number of users in a branch can be determined for given bit rate per channel on the basis of the minimum bandwidth required per user and the percentage of active users at a time. Once the number of user per branch is fixed, the total number of branches and hence the maximum transmission distance can be determined in the following two ways. Once the relationship between  $BER$  and  $P_T$  is known for a given  $N$ , the minimum required  $P_T$  can be determined using this relation in order to maintain a particular  $BER$ . Otherwise, by using the same relation the maximum  $BER$  required for given  $P_T$  and  $N$  is computed. In either case the total number of users which is product of total number of branches and the number of users per branch, is the same. The relation is derived as follows. The power received at photo detector (PD) for bit  $i$  ( $i$  is either 1 or 0) is given by

$$P_R(i) = P_s(i) L_{TR} \quad (3.7)$$

where

$$P_s(1) = \frac{2 P_T}{1 + \epsilon}$$

and

$$P_s(0) = \frac{2 P_T \epsilon}{1 + \epsilon}$$

In these equations,  $P_T$  represents the average transmitter power and  $\epsilon$  the extinction ratio (the ratio of the optical energy emitted in the 0 bit period to that emitting during 1 bit period). The loss  $L_{TR}$  between transmitter and receiver is given by

$$L_{TR}(\text{in dB}) = [L_w + 2(N + 2)L_{sp} + (N - 1)L_{13} + L_{12} + N \alpha L + 11.66 \log_{10} n] \quad (3.8)$$

This includes the total losses of star coupler and two splices loss each at input and output of SC. The signal current and noise variance for bit  $i$  ( $i=0$  or 1) at PD output are given by

$$I_s(i) = R_0 P_R(i) \quad (3.9)$$

$$\sigma^2(i) = 2 e R_0 P_R(i) B_e + \frac{4KT B_e}{R_L} \quad (3.10)$$

where  $K$  is the Boltzmann constant,  $T$  the temperature in Kelvin,  $R_L$  the load resistance of the PD,  $R_0$  the responsivity of the PD,  $e$  the charge of electron and  $B_e$ , the electrical bandwidth of the receiver. The average probability of error considering the threshold level which equalizes the  $BER$  for bit 1 and 0 is

$$P_e = \frac{1}{2} \text{erfc} \left[ \frac{I_s(1) - I_s(0)}{\sqrt{2}[\sigma(0) + \sigma(1)]} \right] \quad (3.11)$$

RECEIVED  
I. I. T. KANPUR  
JAN 12 1964  
126241

## Chapter 4

# System Upgradation by Using Optical Amplifiers

Optical amplifiers, as their name implies, operate only in the optical domain with no inter conversion of photons to electrons. There are two types of OAs: Semiconductor Optical Amplifiers (SOAs) and Doped Fiber Amplifiers (DFAs). Both these work on the principle of stimulated emission. They only differ in the method of pumping SOAs are electrically pumped and DFAs are optically pumped. Fiber amplifier can also be based on the stimulated Raman or Brillouin scattering [6]. Both SOA and DFA have the ability to provide high gain over wide spectral bandwidths making them eminently suitable for future optical fiber system applications

The advent of SOA and fiber amplifier accelerated the pace of deployment of high-capacity lightwave systems. These amplifiers can boost the power of the lightwave signals without the need for optoelectronic conversion and subsequent electronic amplification as in conventional lightwave repeaters [5]. Another advantage of optical amplifier is that data on many wavelength can be simultaneously amplified.



Optical amplifiers enable flexible design of transmission systems with the potential of bit rate transparency and of capacity enhancement through WDM channels. The main purpose of the optical amplifiers is only to restore signal powers in the system so that the  $SNR$  remains acceptably high every where in the system. They do not reconstitute a transmitted signal and therefore the noise and signal distortion accumulates with each amplifier stage. Optical amplifiers can be used in a broad range of system applications namely, as power amplifiers at the optical transmitter, as in-line amplifier, and as preamplifier at optical receivers.

SLAs are preferred to fiber amplifiers as they exhibit low power consumption and their single-mode waveguide structures make them particularly appropriate for use with single-mode fiber. They can be easily integrated with transmitter, receiver or integrated optic devices. Therefore SLAs have been considered in the following analysis.

## 4.1 Amplifier Model

An SLA can be represented by a traveling wave amplifiers (TWA) model as shown in the figure(4.1). If  $G\sqrt{R_1 R_2} < 0.17$ , where  $R_1$  and  $R_2$  are the reflection coefficients of two facets of the amplifiers, and  $G$ , the single-pass saturated gain [2,7]. Gain of these amplifiers reduces with the increase in input optical power level. This is referred to as gain saturation. The saturated gain  $G$  of the amplifier is obtained by solving the following non linear equation.

$$G = G_0 \exp \left( - (G - 1) \frac{P_{in}}{P_{sat}} \right) \quad (4.1)$$

where  $G_0$  is the unsaturated gain,  $P_{in}$  the total input optical power,  $P_{sat}$  the saturation power level. The  $G_0$  and  $P_{sat}$  are the amplifiers parameters [2].

Noise is an inherent characteristic of optical signals. This can be understood by

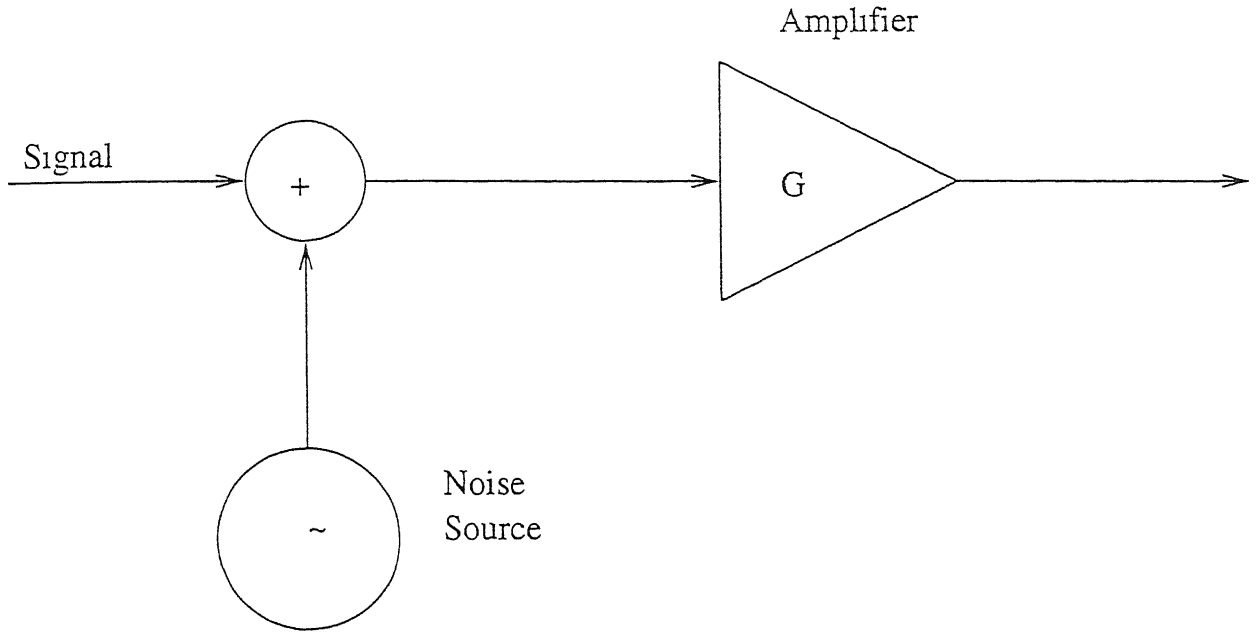


Figure 4.1: Optical amplifier model

using elementary quantum mechanics and the Heisenberg uncertainty principle. A bunch of photons of mean number  $\langle n \rangle$  produced by a coherent light source such as a laser, is characterized by Poisson counting statistics, whereas a thermal source, such as a light-emitting diode, has Bose-Einstein Statistics. Although not strictly accurate, the noise statistics of the amplified light and photoelectrons are usually approximated as Gaussian [6]. The SLA's, in addition to amplified signals, also produce amplified spontaneous emission (ASE) noise. This noise degrades the system performance. It is considered to be white with a single-sided power spectral density (PSD)

$$S_{sp} = n_{sp} (G - 1) h\nu \quad (4.2)$$

where  $n_{sp}$  is spontaneous emission noise factor,  $h$  is the Planck's constant, and  $\nu$  the optical frequency [2].

At the photo detector (PD), the ASE noise beats with signal and itself to produce ASE-signal and ASE-ASE beat noise components. When ASE noise beats with itself, it also produces, a dc signal which is responsible for additional shot noise component. The

variances of different beat noise current components are [2] :

$$\sigma_{ASE-ASE}^2 = R_0^2 S_{sp}^2 [2 B_e B_0 - B_e^2] \quad (4.3)$$

$$\sigma_{ASE-sig}^2 = 4 R_0^2 P_R S_{sp} B_e \quad (4.4)$$

and

$$\sigma_{ASE-shot}^2 = 2 e R_0 [S_{sp} B_0] B_e \quad (4.5)$$

In the above equations,  $R_0$  is responsivity of  $PD$ ,  $B_e$  the electrical bandwidth of receiver.  $B_0$  the optical bandwidth and  $e$  the electron charge

## 4.2 Network with Unsaturated amplifier

Supportable number of users can be increased by using optical amplifiers as power amplifiers. The amplifier placed at the output of WDM will act as power amplifier which amplifies multichannel WDM signals equally. The farthest user transmits more power as compared to nearer one in order to compensate the channel loss. Let a user in the branch  $N$  transmits and receives the powers  $P_{Tn}$  and  $P_{Rn}$  respectively and the amplifier gain is  $G$ . The total losses between the  $CO$  and a customer is the same for both upstream and downstream directions. The power budget analysis discussed for downstream path is also valid for the upstream path if the condition  $G + 1 = k$  is satisfied. In the above equation  $k$  represents the sum of  $P_{Tn}$  and  $P_{Rn}$ . It is assumed that the condition is satisfied in this analysis

For a given number of amplifiers the network may be able to support more users as compared to any other networks, when the amplifiers are placed at proper distance on the bus.

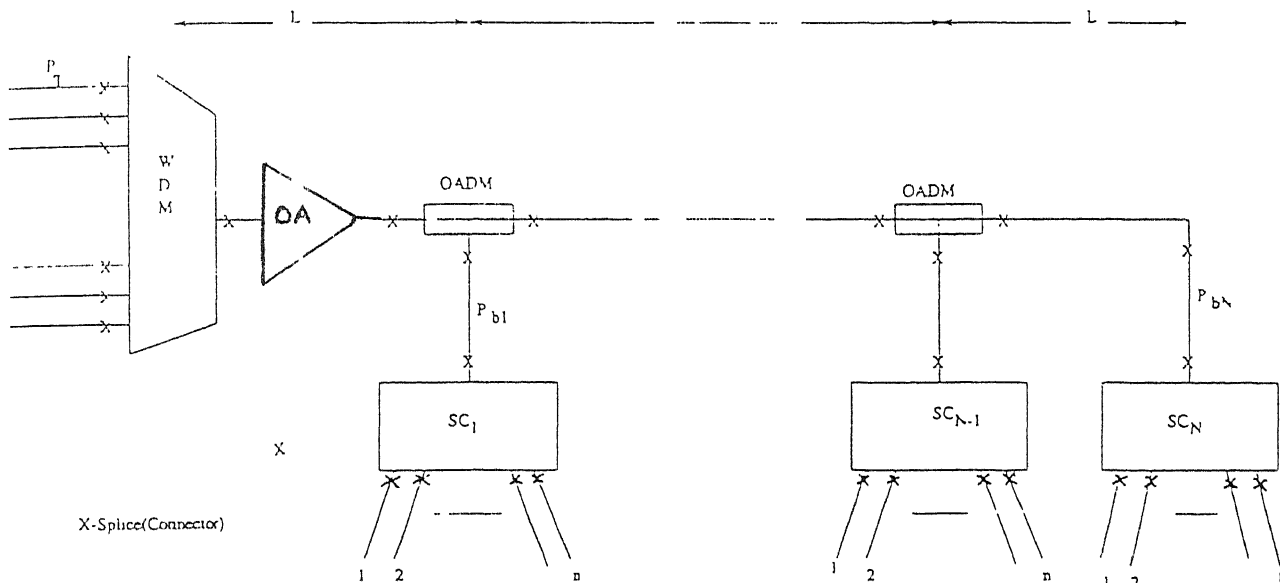


Figure 3.1: System model

At the branch- $N$  the power received is minimum and the total loss between the transmitter and receiver is maximum. Therefore, it is considered as the worst case for the analysis. The power received at each branch is equally divided among the  $n$  users through a star coupler (SC).

The optical power available at a receiver is equal to the optical power available at the branch minus the coupler losses. The minimum optical power required at the receiver is equivalent to its sensitivity in order to maintain a particular  $BER$  for given bit rate. The receiver sensitivity is defined as the minimum optical input power (measured in  $dBm$ ) for which the  $BER$  measured at the receiver is  $10^{-9}$  [7].

For bit rates between  $10\text{ Mb/s}$  and  $2.5\text{ Gb/s}$  and over the wavelength range of  $0.8 - 1.6\text{ }\mu m$  the best optical receivers require a flux of  $300 - 1000$  photons per bit corresponding to a sensitivity of

$$P_R = 2 \times 10^{-13} \cdot B \text{ mW} \quad (3.6)$$

where  $B$  is the bit rate in bits/sec per channel [6].

Let the gain of unsaturated amplifier be  $G_0$  The  $P_R(1)$  at the receiver is given by

$$P_R(1) = P_S(1) G_0 L_{TR} \quad (4.6)$$

The ASE noise psd at the receiver will be

$$S_{sp} = n_{sp} (G_0 - 1) h \nu L_{TR} \quad (4.7)$$

The signal current and noise variance for bit 1 are given by

$$I_s(1) = R_0 P_R(1) \quad (4.8)$$

and

$$\begin{aligned} \sigma^2(1) = 2eR_0 [P_R(1) + S_{sp}B_0] B_e + 4R_0^2 P_R(1) S_{sp} B_e + \\ R_0^2 S_{sp}^2 [2B_0 B_e - B_e^2] + \frac{4KT B_e}{R_L} \end{aligned} \quad (4.9)$$

The average probability of error with threshold level which equalizes the  $BER$  for bit 1 and 0 is determined by using equations (4.8) (4.9) and (3.11)

### 4.3 Network with Average gain Saturated amplifier

Let  $N_1$  channels out of total  $N$  channels are having bit 1. The probability that  $N_1$  channels are having bit 1 is given by

$$P_{N1} = \binom{N}{N_1} \left[ \frac{1}{2} \right]^N \quad (4.10)$$

Here, the probability distribution of number of channels having bit1 is presumed to be binomial. The input power to the amplifier corresponding to bit  $i$  is

$$P_{in}(i) = P_s(i) \quad (4.11)$$

The total input power to the amplifier is  $N_1 P_{in}(1) + (N - N_1)P_{in}(0)$ . The corresponding saturated gain  $G(N_1)$  of the amplifier is computed using equation (4.1) with the above input power. The average gain is given by

$$G_{av} = \sum_{N_1=0}^N P_{N_1} G(N_1) \quad (4.12)$$

The signal power received for bit  $i$  will be

$$P_R(i) = P_{in}(i) G_{av} L_{TR} \quad (4.13)$$

As  $G_{av}$  is independent of signal bit, the ASE noise psd for both bit 1 and 0 will be same. It is given by

$$S_{sp} = n_{sp} [G_{av} - 1] h\nu L - TR \quad (4.14)$$

The signal currents and noise variances are given by

$$I_s(i) = R_0 P_R(i) \quad (4.15)$$

and

$$\begin{aligned} \sigma^2(i) = & 2eR_0 [P_R(i) + S_{sp}B_0] B_e + 4R_0^2 P_R(i) S_{sp} B_e + \\ & R_0^2 S_{sp}^2 [2B_0 B_e - B_e^2] + \frac{4KT B_e}{R_L} \end{aligned} \quad (4.16)$$

The average  $P_e$  is calculated by using the equations (4.15), (4.16) and (3.11).

# Chapter 5

## Example

Consider a set of  $N$  wavelengths corresponding to the number of branches ( $N = 1, 2, 3, \dots$ ), there are  $n$  number of users per branch ( $n = 2^i$ , where  $i$  is an integer) and data rate for each channel as  $2.5 \text{ Gbits/sec}$ . If the minimum bit rate required per user and the active users at anytime are assumed to be  $100 \text{ Mbits/sec}$  and  $75\%$  respectively then the maximum number of users per branch comes out to be 32. Typical values of parameters used for computations in the system analysis are:

- maximum allowed transmitter power,  $P_T, 0 \text{ dBm}$
- desired  $BER, 10^{-9}$
- insertion loss of single  $2 \times 2$  coupler,  $L_d, 0.5 \text{ dB}$
- insertion loss of splice,  $L_{sp}, 0.5 \text{ dB}$
- insertion loss of WDM device,  $L_w, 0.5 \text{ dB}$
- fiber attenuation coefficient,  $\alpha, 0.2 \text{ dB/Km}$
- distance between branches,  $L, 5 \text{ Km}$

- receiver load resistance,  $R_L, 100 \Omega$
- operating wavelength,  $\lambda, 1.55 \mu m$
- optical bandwidth,  $B = 0.25 THz$
- electrical bandwidth,  $B_e, 2.5 THz$
- receiver temperature,  $T, 300^\circ K$
- electron charge,  $e = 1.602 \times 10^{-19} C$
- quantum efficiency of PD,  $\eta, 1$
- responsivity of PD,  $R_0, 1.28$

The total number of users supported by the network and hence the maximum transmission distance is determined by computing the minimum transmitter power required for various values of  $N$ . The computation is repeated for different values of the number of users per branch,  $n$ , and the extinction ratio,  $\epsilon$ . The maximum values of  $n$  for different bandwidths (minimum) per user are determined as 32, 16, 8 and 4. The effectiveness of OAs with and without saturation is also analyzed.

The supportability has been computed for given  $P_T$  and  $n$ . For example, when  $P_T$ , and  $\epsilon$  were assumed to be 0 dBm and 0.05 respectively, the maximum supportable number of users for different values of  $n$  were determined and tabulated in the following table.

<i>No. of users per branch</i>	<i>Total no. of users supported (<math>N_u</math>)</i>		
$n$	without OA	unsat OA	sat OA
32	64	448	192
16	48	240	112
8	40	136	64
4	24	72	40



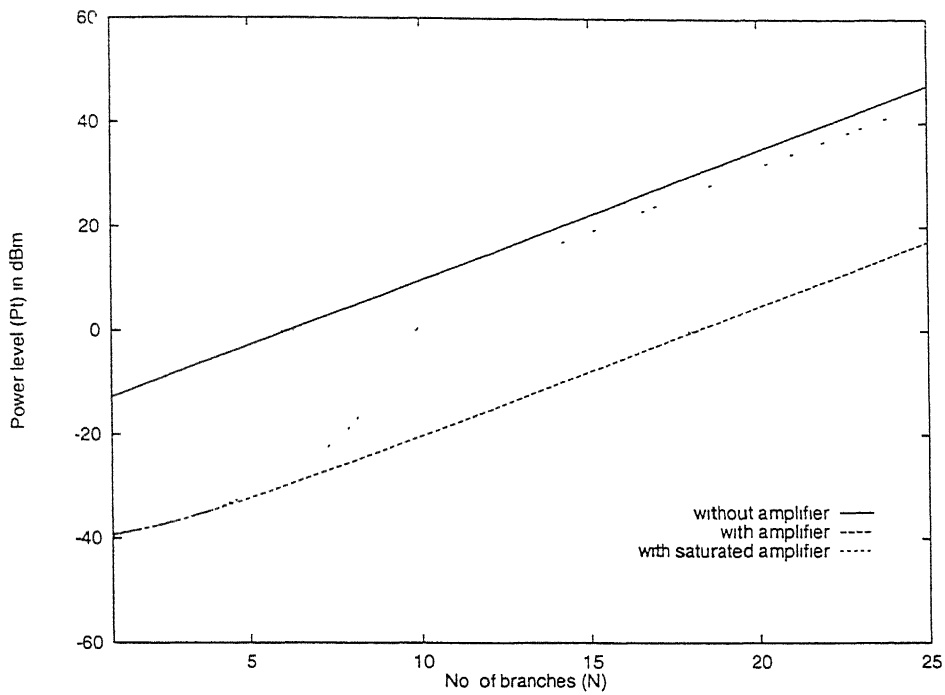


Figure 5.1: Variation of  $P_T$  Vs  $N$  for  $n=4$  and  $\epsilon=0.05$

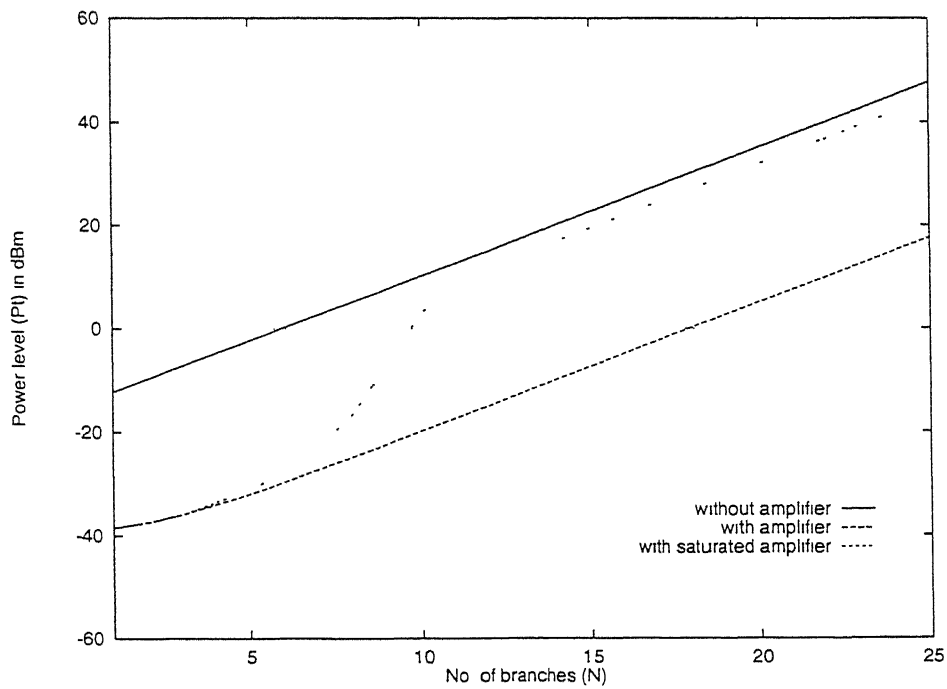


Figure 5.2: Variation of  $P_T$  Vs  $N$  for  $n=4$  and  $\epsilon=0.10$

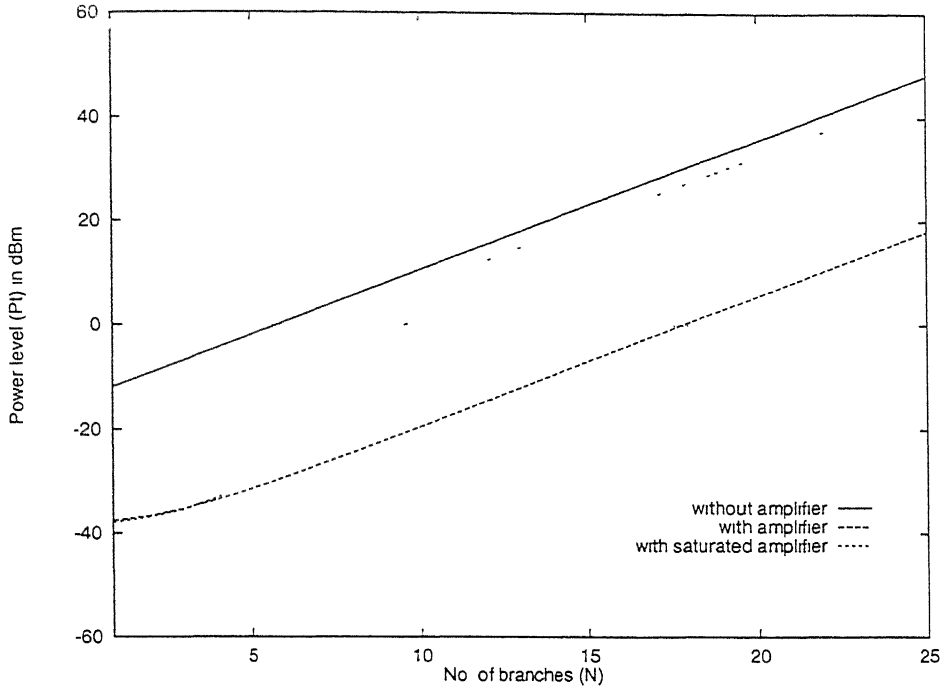


Figure 5.3. Variation of  $P_T$  Vs  $N$  for  $n=4$  and  $\epsilon=0.15$

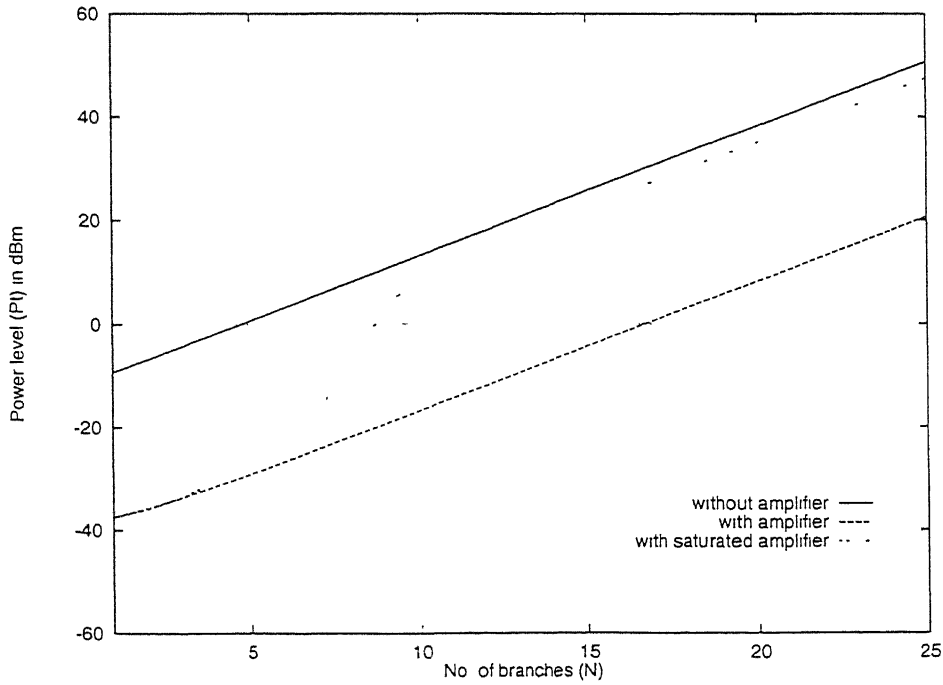


Figure 5.4. Variation of  $P_T$  Vs  $N$  for  $n=8$  and  $\epsilon=0.05$

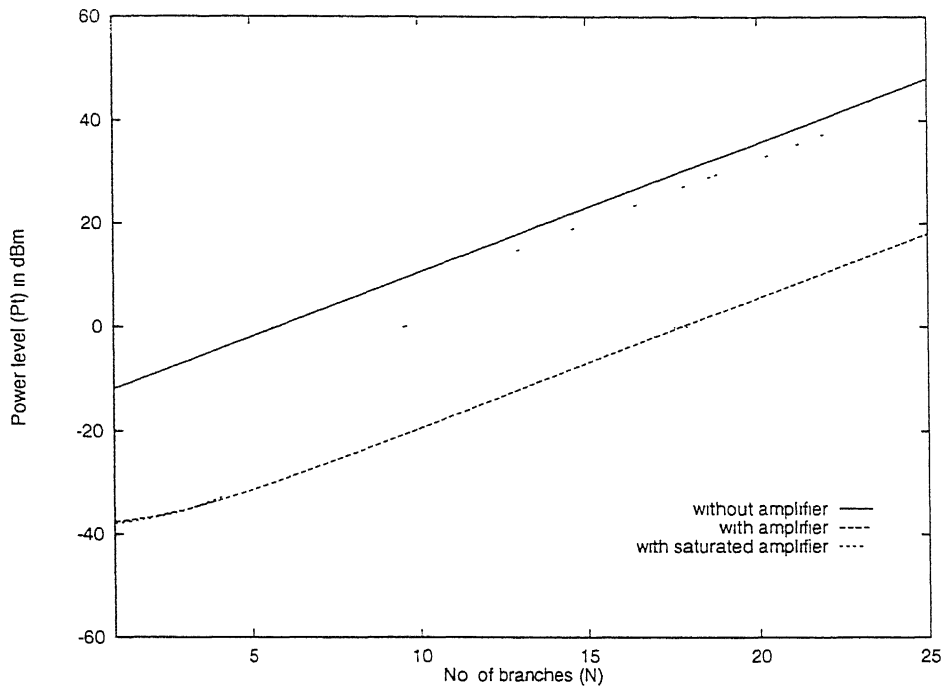


Figure 5.3: Variation of  $P_T$  Vs  $N$  for  $n=4$  and  $\epsilon=0.15$

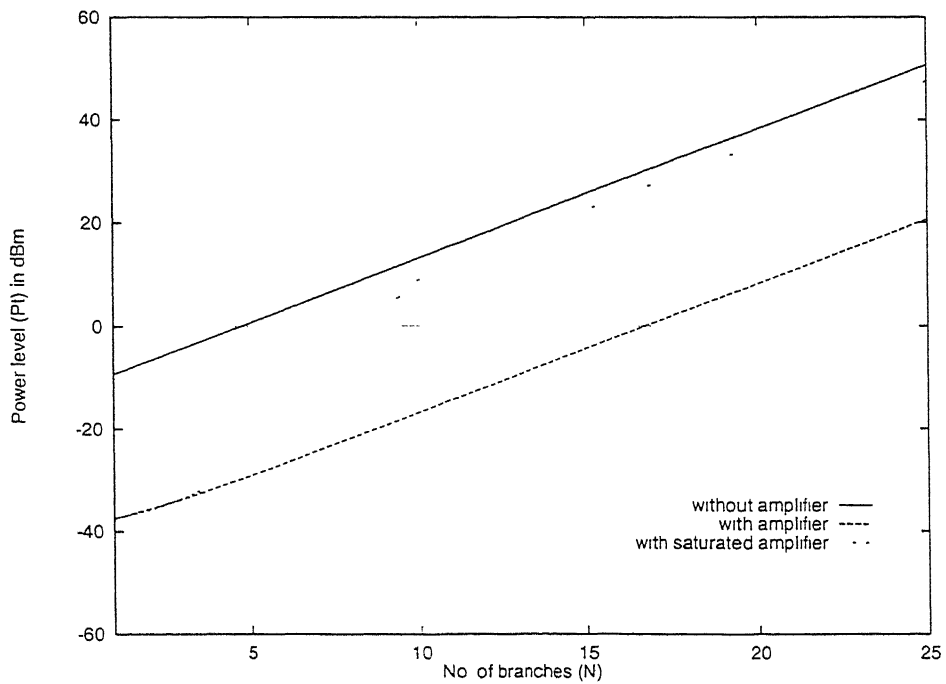


Figure 5.4: Variation of  $P_T$  Vs  $N$  for  $n=8$  and  $\epsilon=0.05$

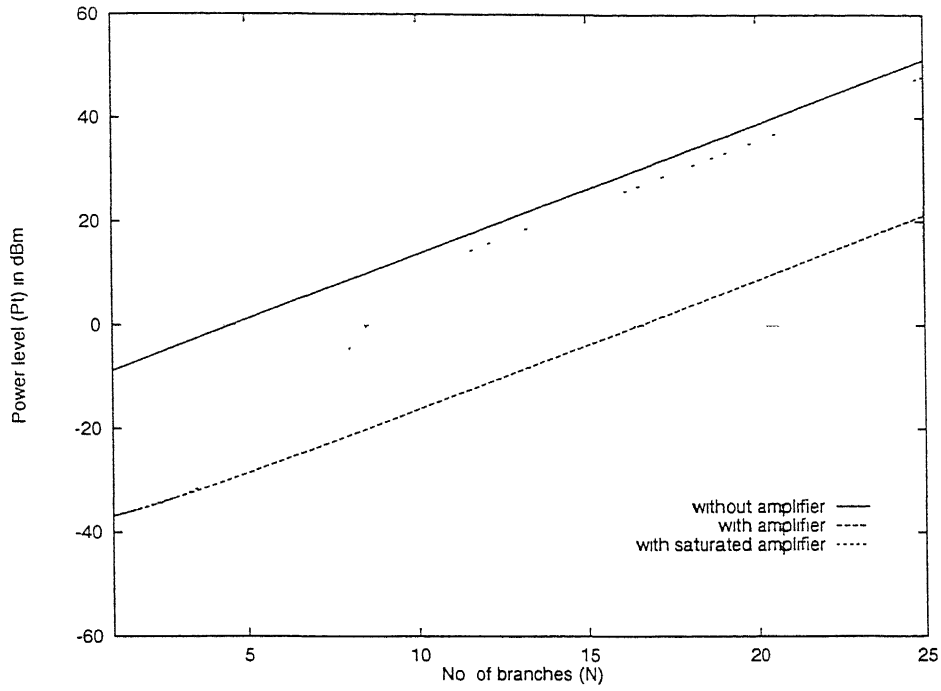


Figure 5.5: Variation of  $P_T$  Vs  $N$  for  $n=8$  and  $\epsilon=0.10$

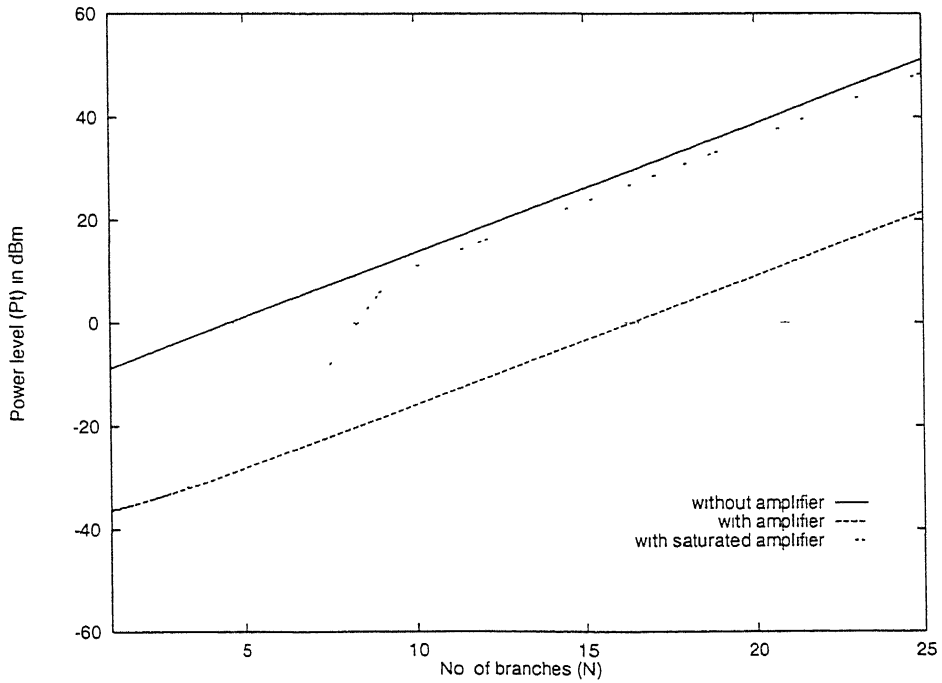


Figure 5.6 Variation of  $P_T$  Vs  $N$  for  $n=8$  and  $\epsilon=0.15$

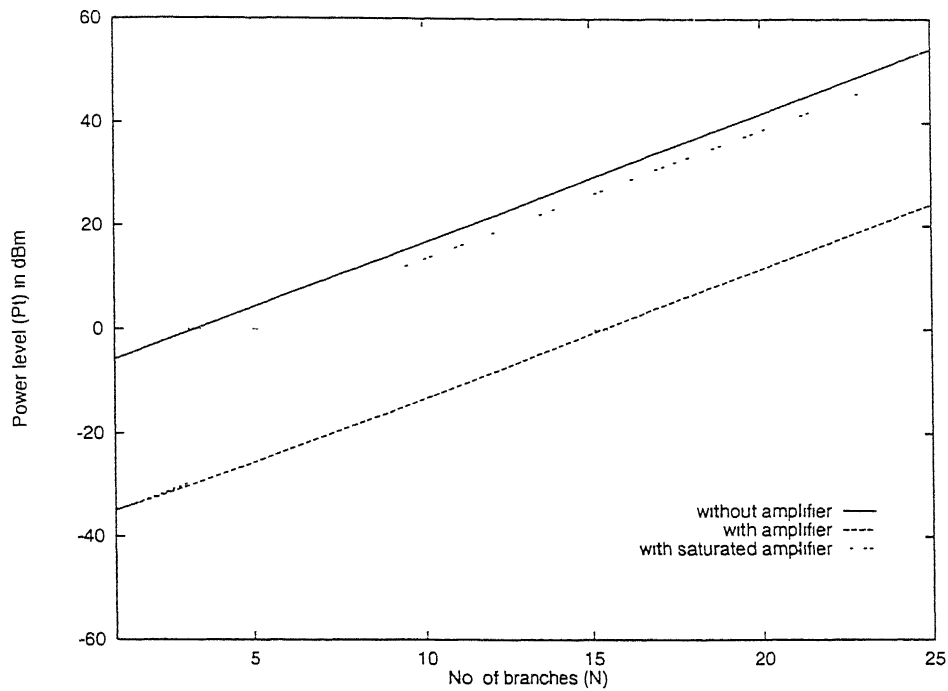


Figure 5.7: Variation of  $P_T$  Vs  $N$  for  $n=16$  and  $\epsilon=0.05$

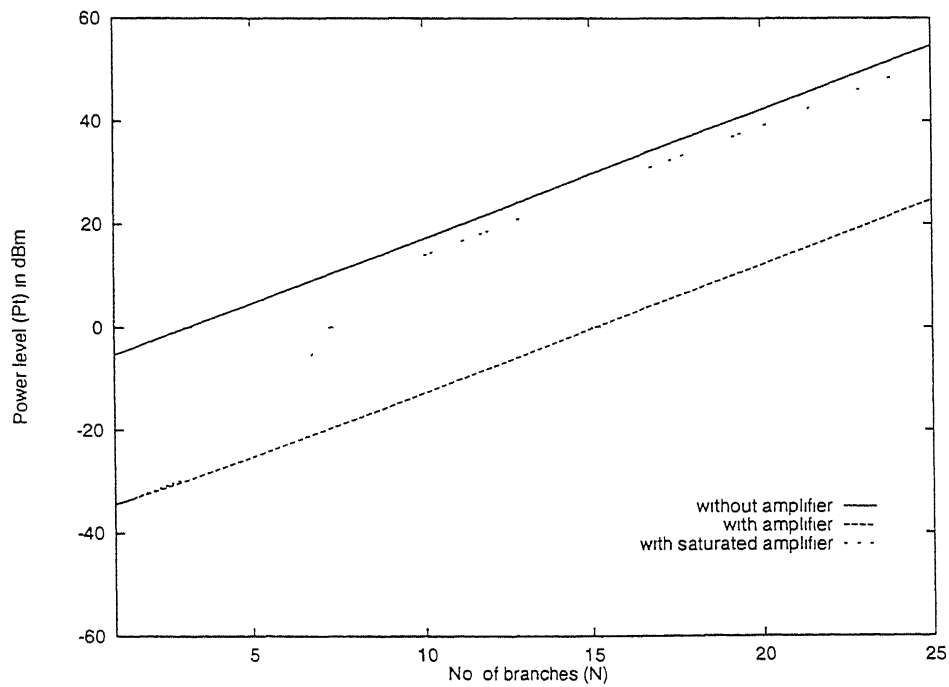


Figure 5.8: Variation of  $P_T$  Vs  $N$  for  $n=16$  and  $\epsilon=0.10$

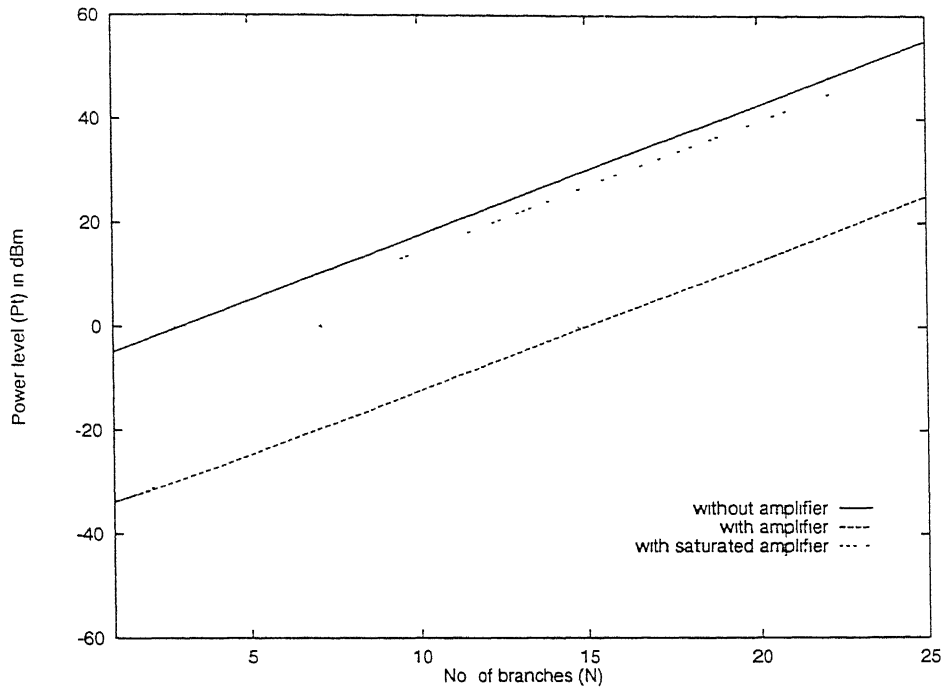


Figure 5.9: Variation of  $P_T$  Vs  $N$  for  $n=16$  and  $\epsilon=0.15$

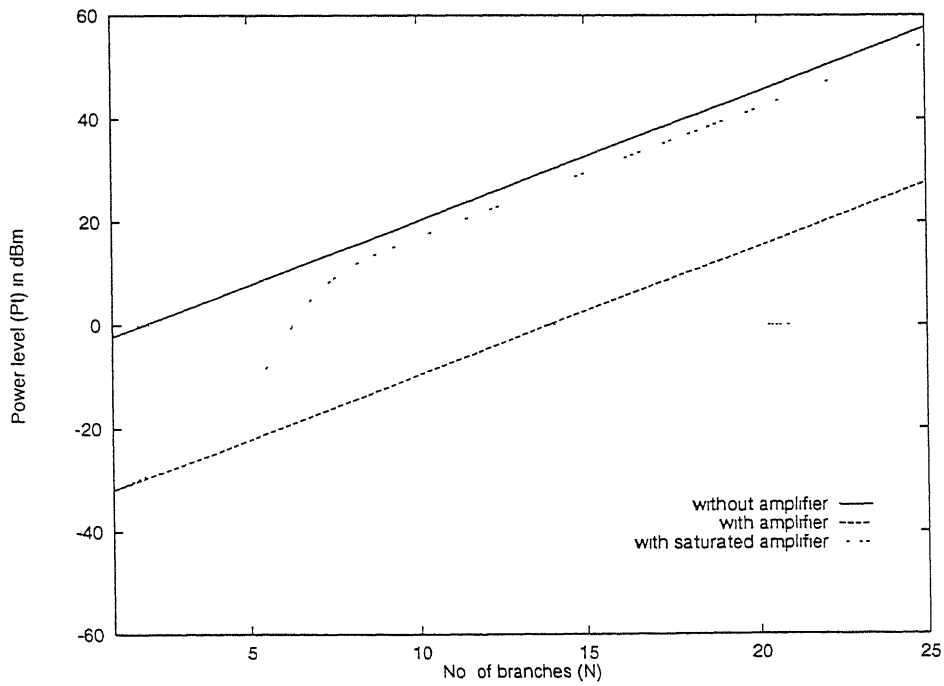


Figure 5.10: Variation of  $P_T$  Vs  $N$  for  $n=32$  and  $\epsilon=0.05$

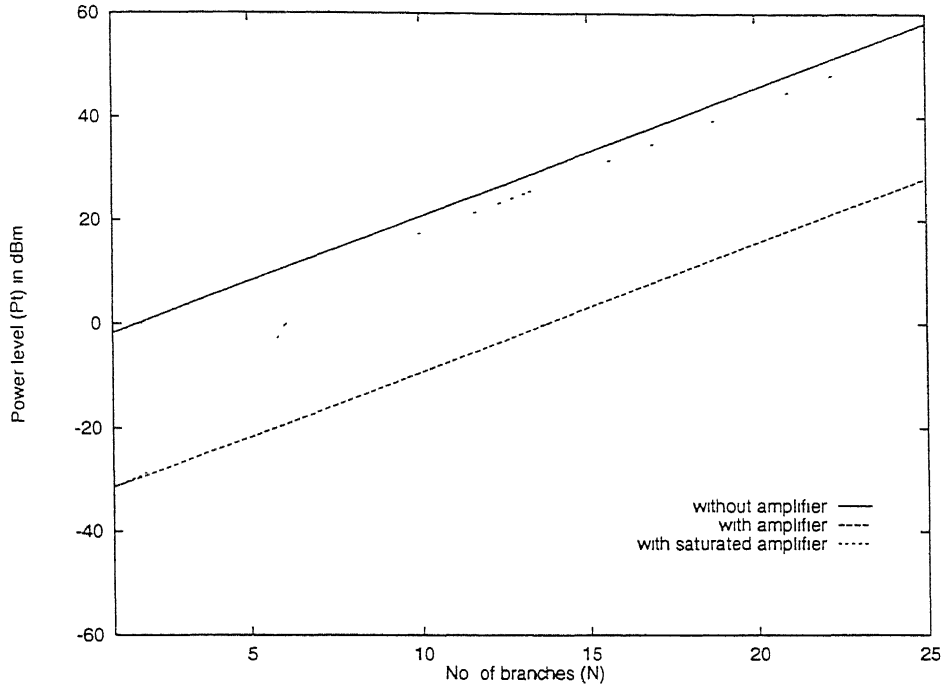


Figure 5.11: Variation of  $P_T$  Vs  $N$  for  $n=32$  and  $\epsilon=0.10$

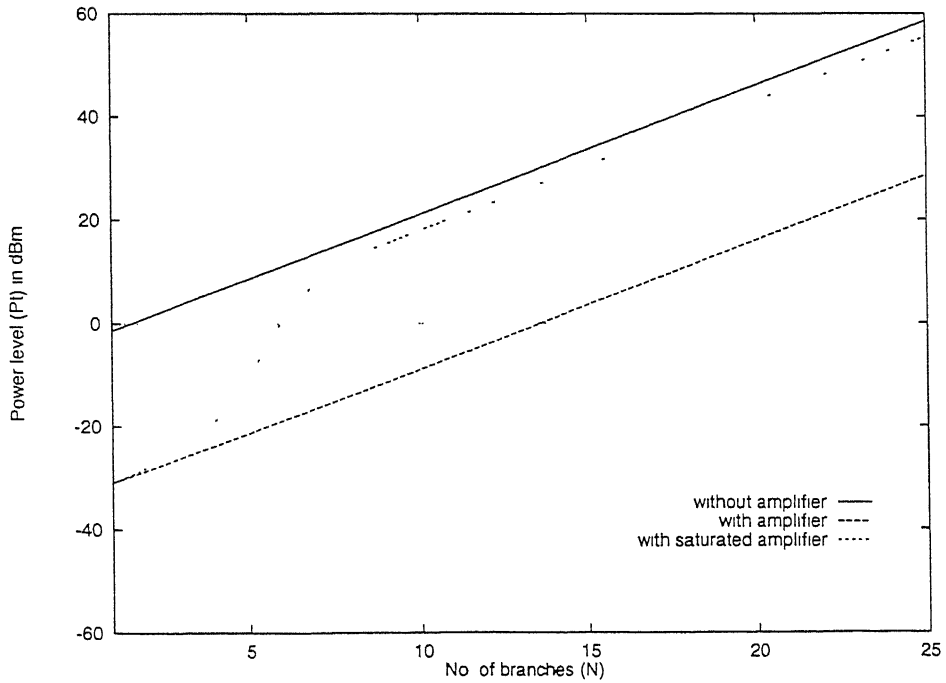


Figure 5.12: Variation of  $P_T$  Vs  $N$  for  $n=32$  and  $\epsilon=0.15$

The above table shows that when the number of users per branch is reduced for a given  $P_T$  the supportability of the system is also reduced with increase in transmission distance. For example, when  $n$  is halved, the bandwidth per user is doubled. The table also shows that the throughput which is defined as product of the total number of users and the bit rate per user is increasing with decrease in  $n$ . The variation of  $P_T$  with  $N$  for different values of  $n$  and  $\epsilon$  has also been computed. The results are shown in figures 5.1 to 5.33. The important observations along with the effects of amplifier's gain saturation, and the extinction ratio are discussed based on these figures.

a) The use of optical amplifier with or without gain saturation always reduces the minimum required  $P_T$  as compared to the without amplifier case (see figures 5.1 to 5.12)

b) When  $N$  is less (say  $N \leq 5$ ), the effect of gain saturation is not severe and the required  $P_T$  is comparable with that of unsaturated amplifier case (see figures 5.1 to 5.12)

c) For large values of  $N$ , the power penalty increases and the system performance is degraded due to the gain saturation effect. This is due to the increase in the total input power in order to maintain the given  $BER$  when the losses are increased in the system (see figures 5.1 to 5.12).

d) Though, the saturation effect of the amplifier degrades the system performance, it supports more number of users as compared to without amplifier case (see figures 5.1 to 5.12)

e) For the given  $n$  the effect of  $\epsilon$  is determined in all the three cases and found that the extinction ratio is not giving any noticeable effect on the variation of  $P_T$  (see figures 5.22 to 5.33).



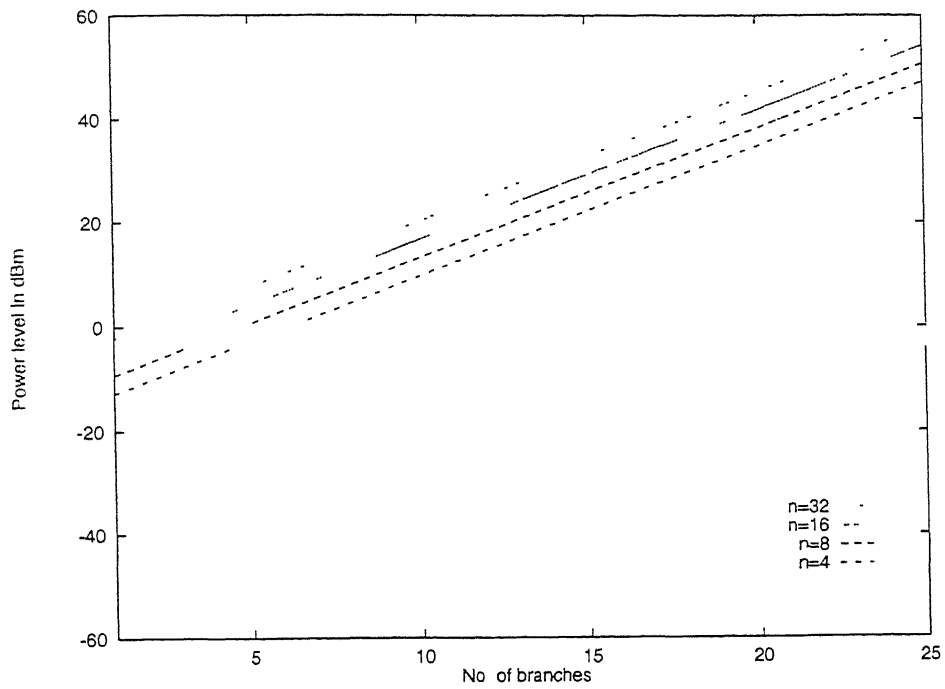


Figure 5.13: Variation of  $P_T$  Vs  $N$  without amplifier for  $\epsilon = 0.05$

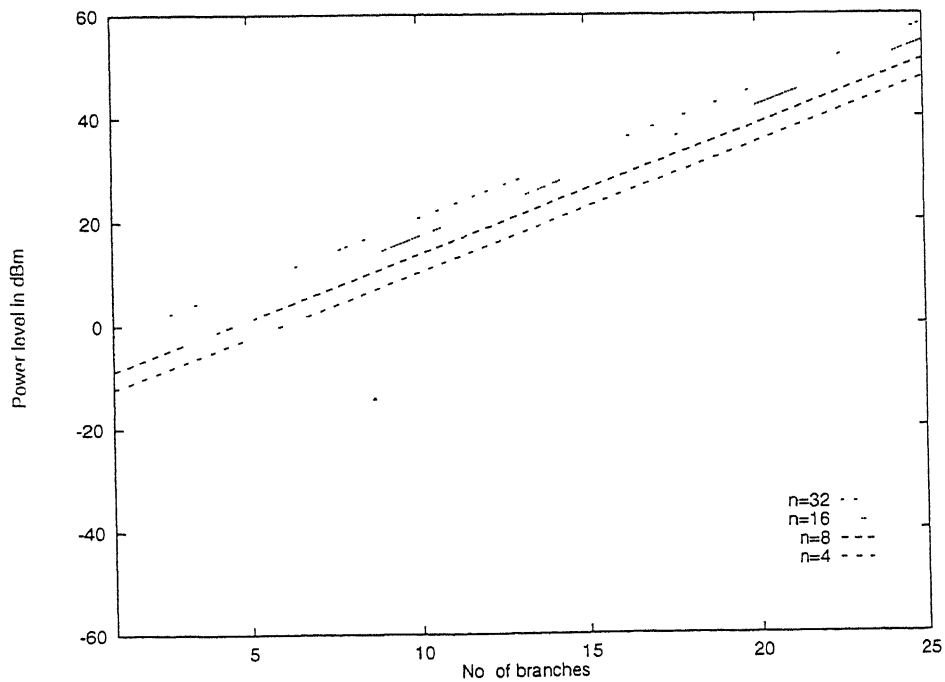


Figure 5.14: Variation of  $P_T$  Vs  $N$  without amplifier for  $\epsilon = 0.10$

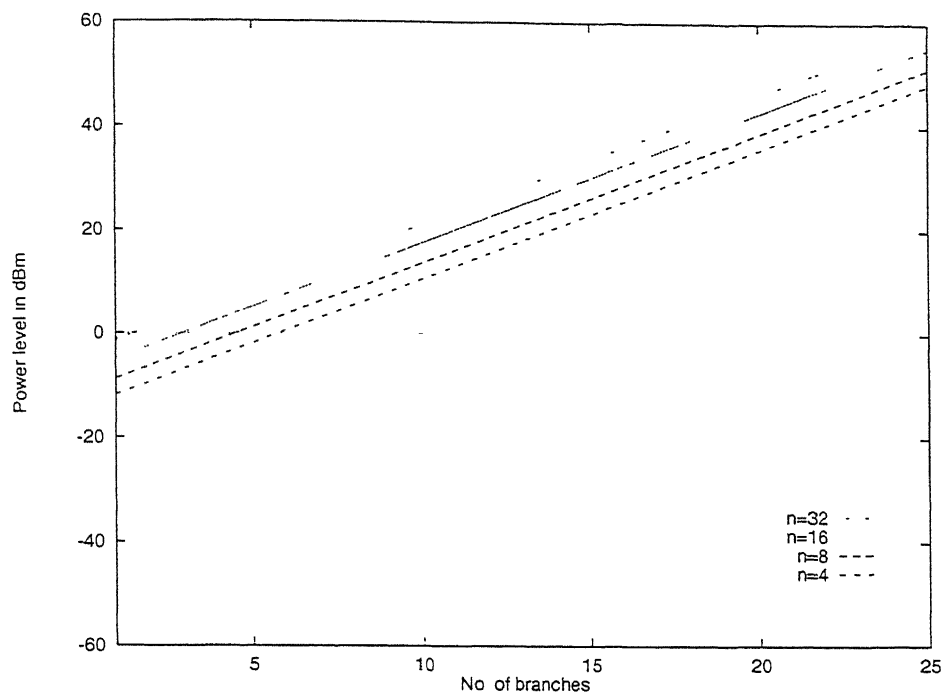


Figure 5.15: Variation of  $P_T$  Vs  $N$  without amplifier for  $\epsilon = 0.15$

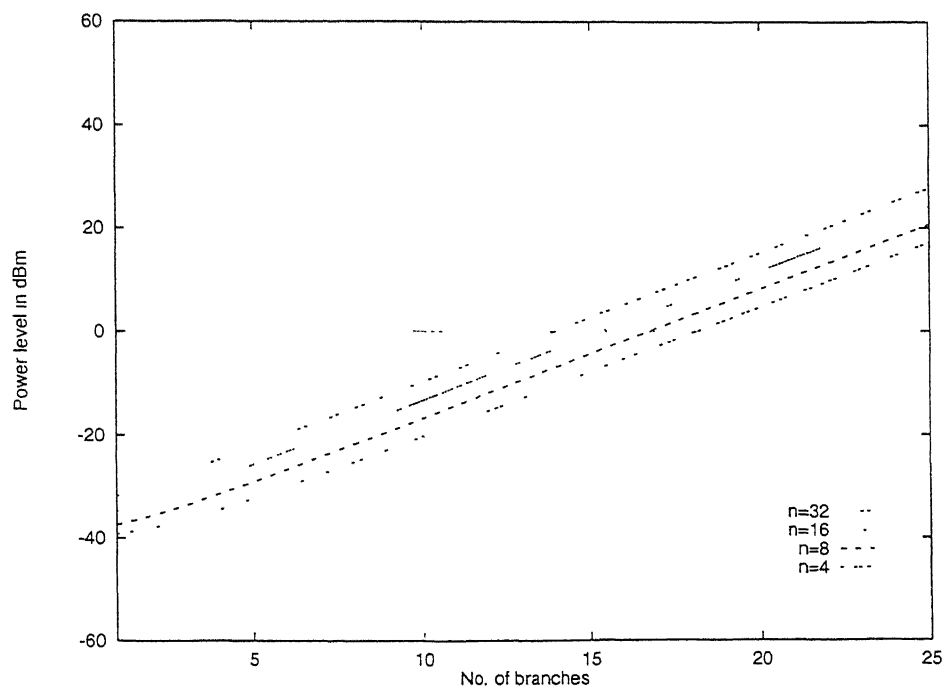


Figure 5.16: Variation of  $P_T$  Vs  $N$  with amplifier for  $\epsilon = 0.05$

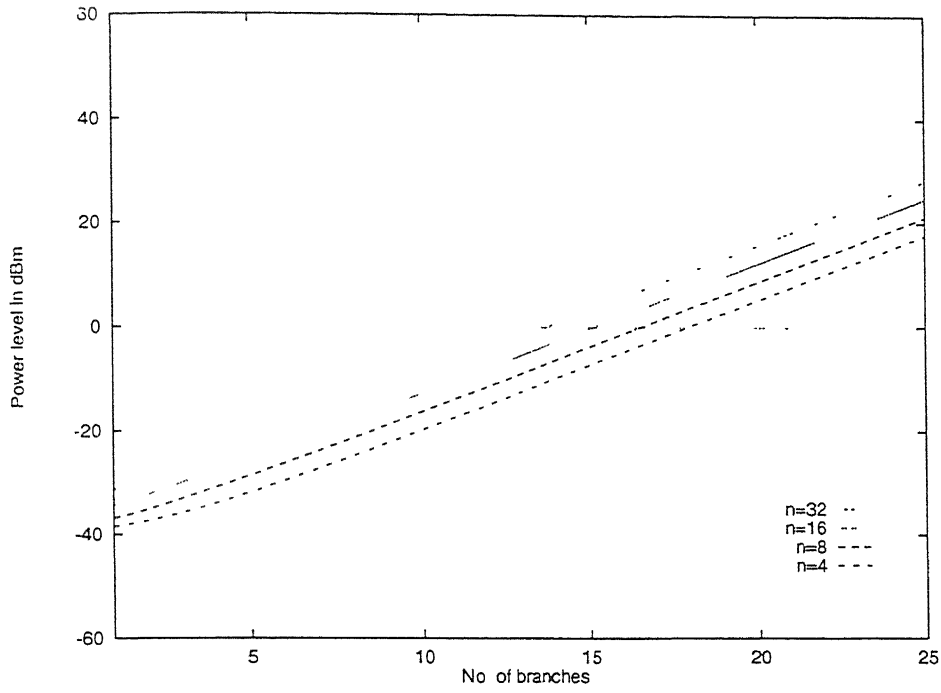


Figure 5.17: Variation of  $P_T$  Vs  $N$  with amplifier for  $\epsilon=0.10$

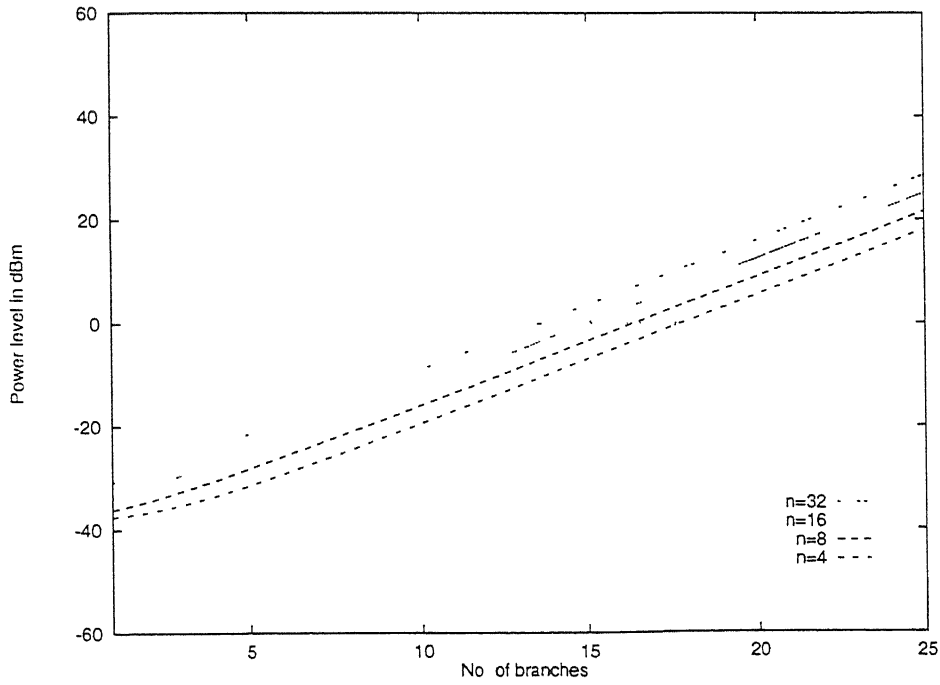


Figure 5.18: Variation of  $P_T$  Vs  $N$  with amplifier for  $\epsilon=0.15$

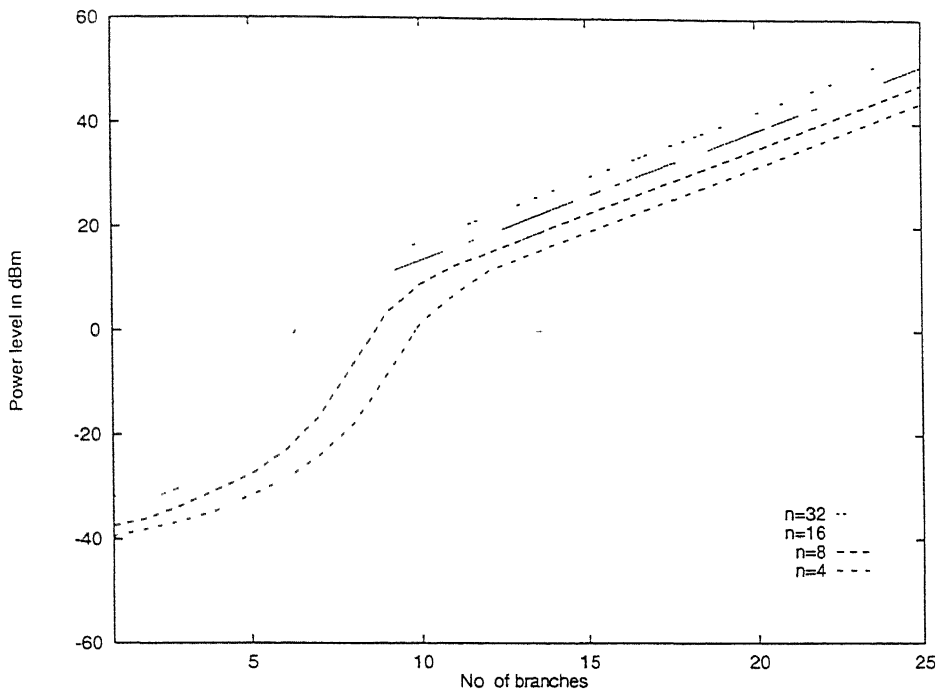


Figure 5.19. Variation of  $P_T$  Vs  $N$  with saturated amplifier for  $\epsilon=0.05$

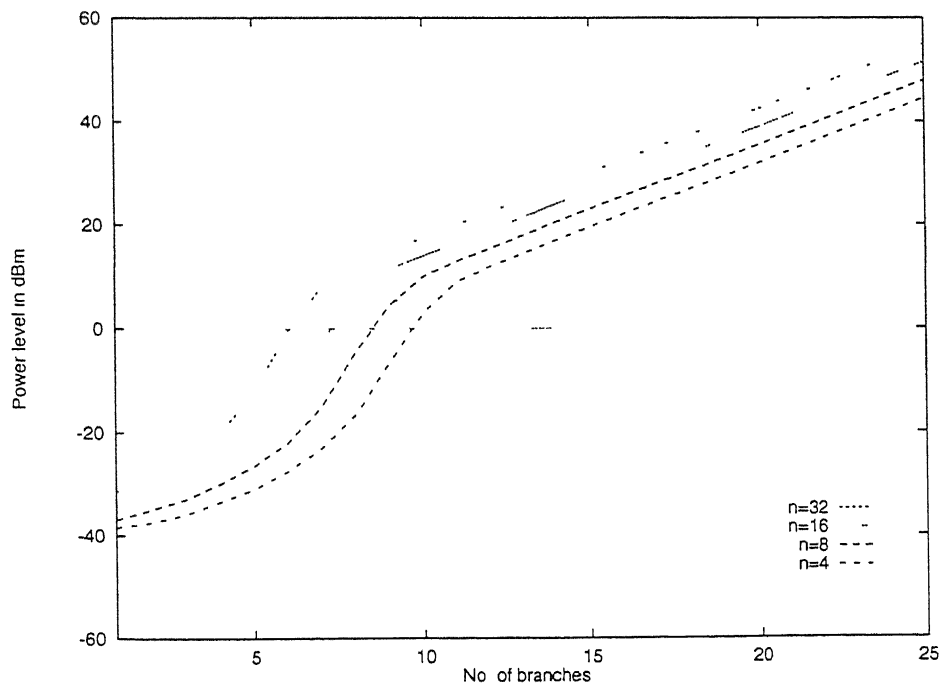


Figure 5.20: Variation of  $P_T$  Vs  $N$  with saturated amplifier for  $\epsilon=0.10$

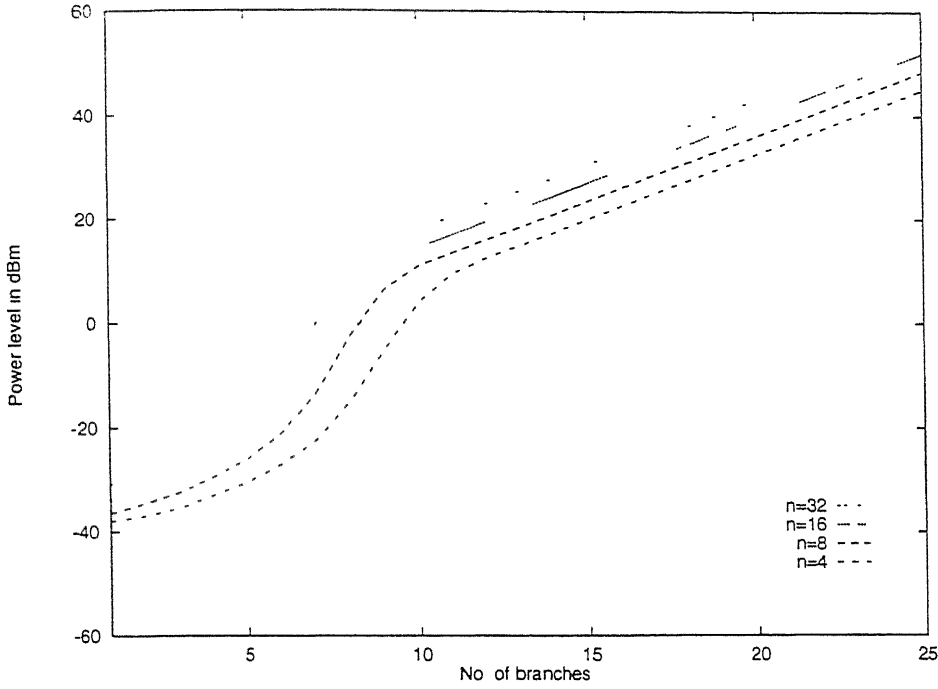


Figure 5.21. Variation of  $P_T$  Vs  $N$  with saturated amplifier for  $\epsilon=0.15$

f) Variation of  $P_T$  for different values of  $n$  (say, 32, 16, 8 and 4) at particular value of  $\epsilon$  in three cases is also studied and found that the minimum required  $P_T$  is decreasing with decrease in  $n$  for a given  $N$  (see figures 5.13 to 5.21)

g) In the without amplifier case, the variation of  $P_T$  with  $N$  for different values of  $n$  and  $\epsilon$  is compared. The same procedure is repeated for amplifier with and without gain saturation. It is found that the reduction in the minimum required  $P_T$  with respect to without amplifier case is approximately same for small values of  $N$  for both with and without gain saturation (see figures 5.1 to 5.21).

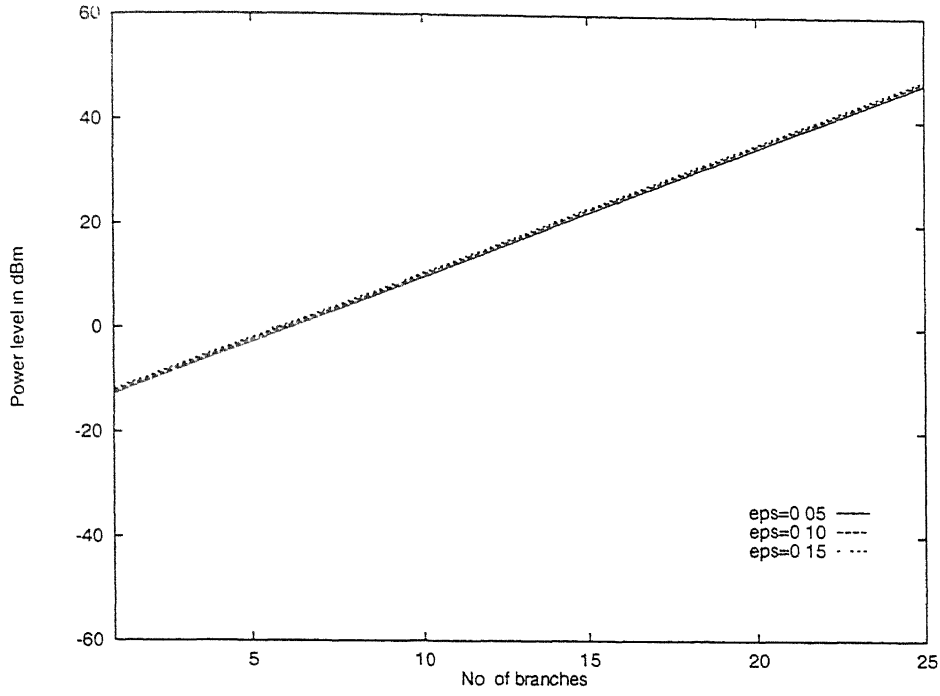


Figure 5.22: Variation of  $P_T$  Vs  $N$  without amplifier for  $n=4$

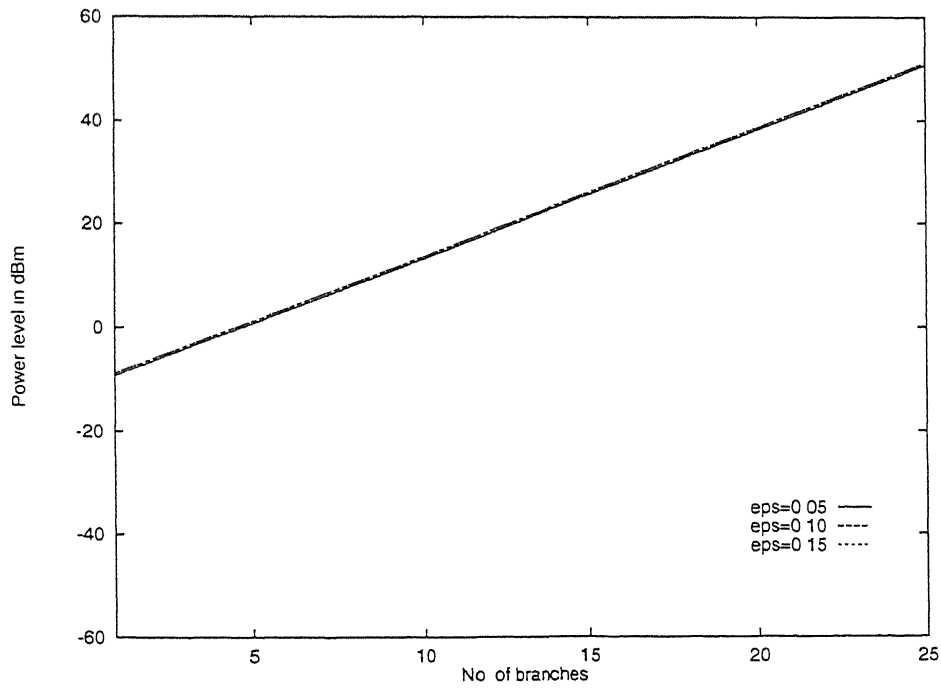


Figure 5.23: Variation of  $P_T$  Vs  $N$  without amplifier for  $n=8$

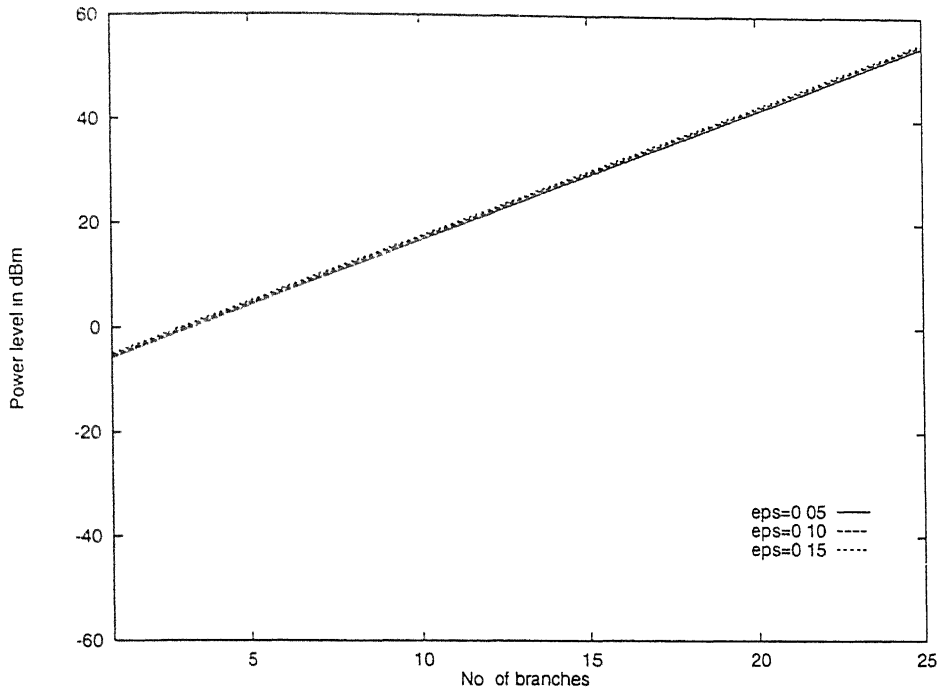


Figure 5.24: Variation of  $P_T$  Vs  $N$  without amplifier for  $n=16$

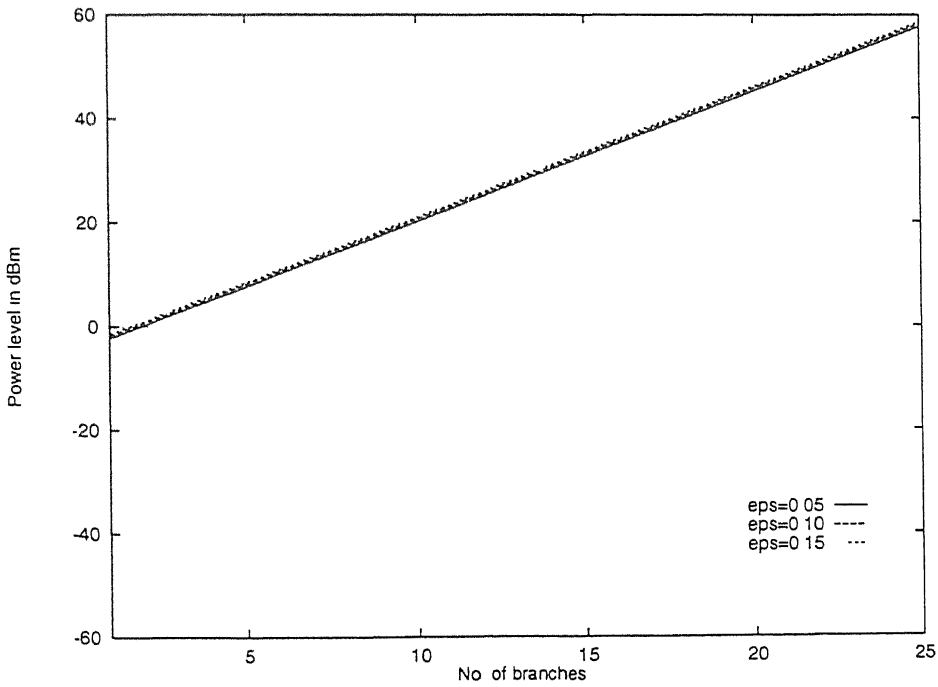


Figure 5.25: Variation of  $P_T$  Vs  $N$  without amplifier for  $n=32$

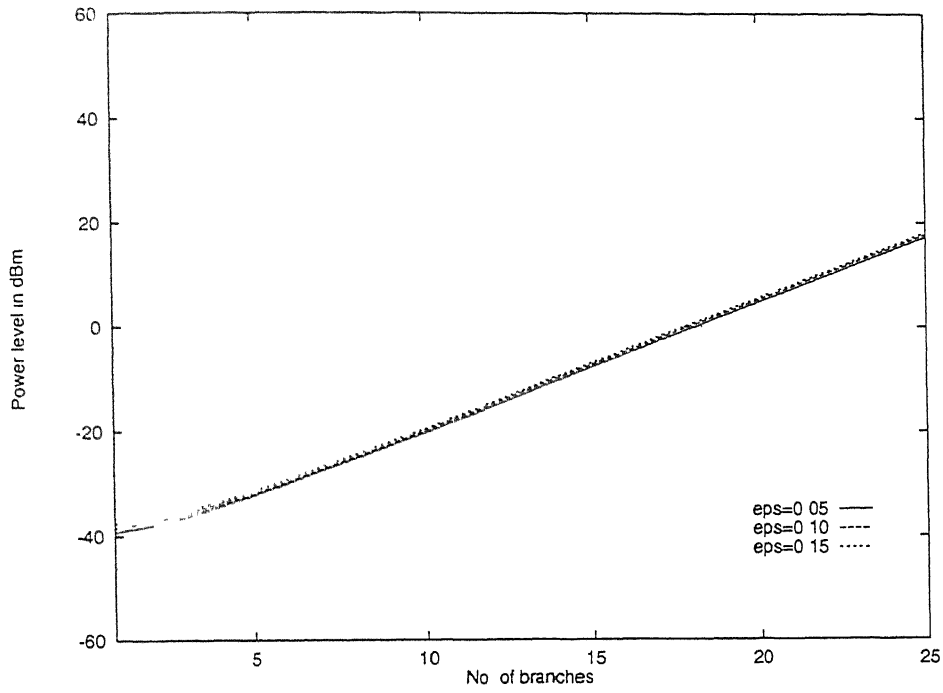


Figure 5.26: Variation of  $P_T$  Vs  $N$  with amplifier for  $n=4$

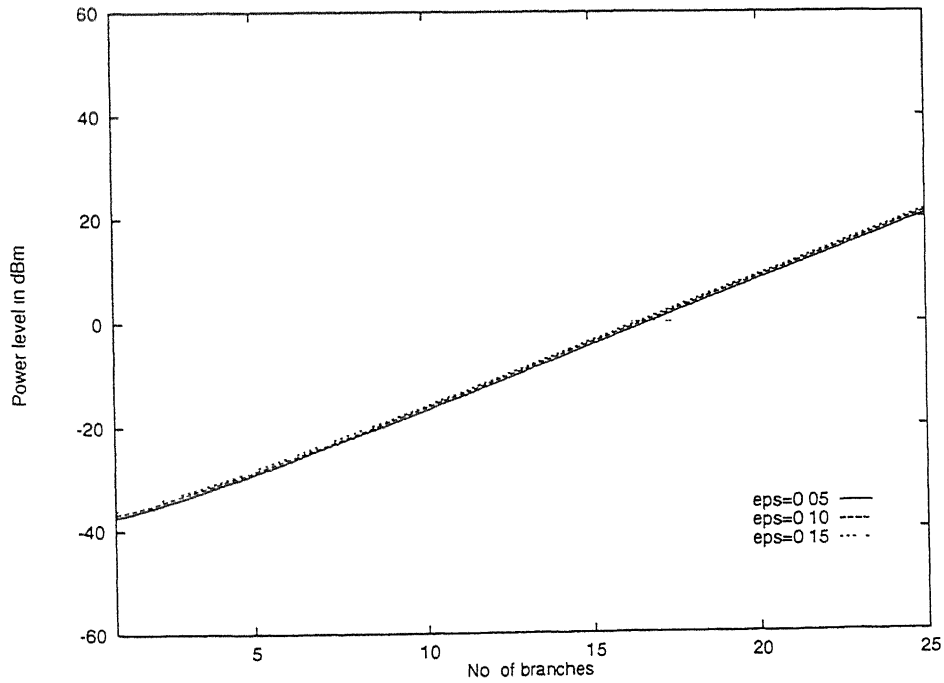


Figure 5.27: Variation of  $P_T$  Vs  $N$  with amplifier for  $n=8$



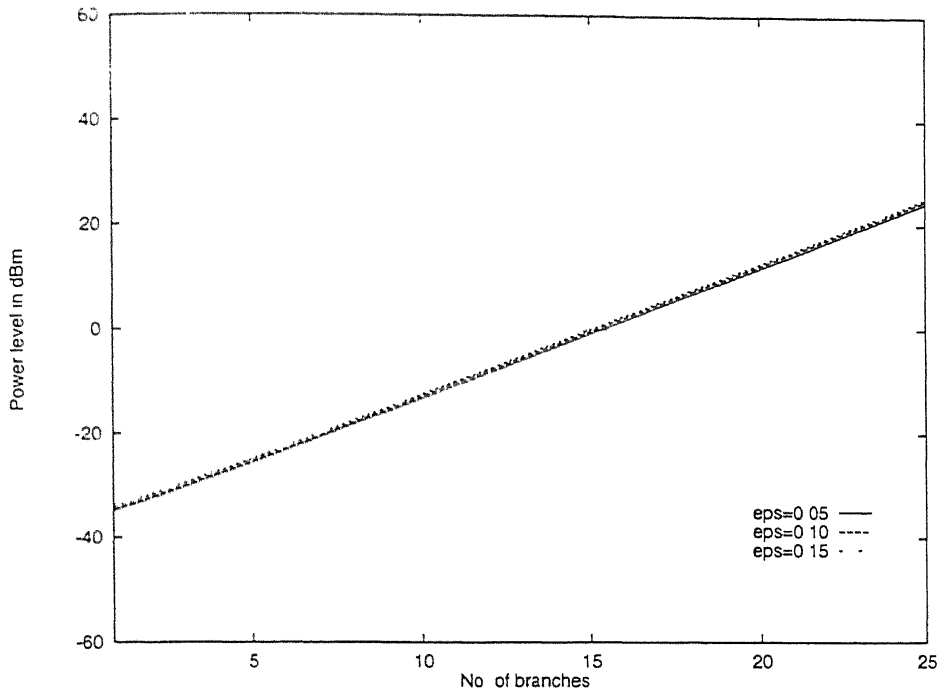


Figure 5.28. Variation of  $P_T$  Vs  $N$  with amplifier for  $n=16$

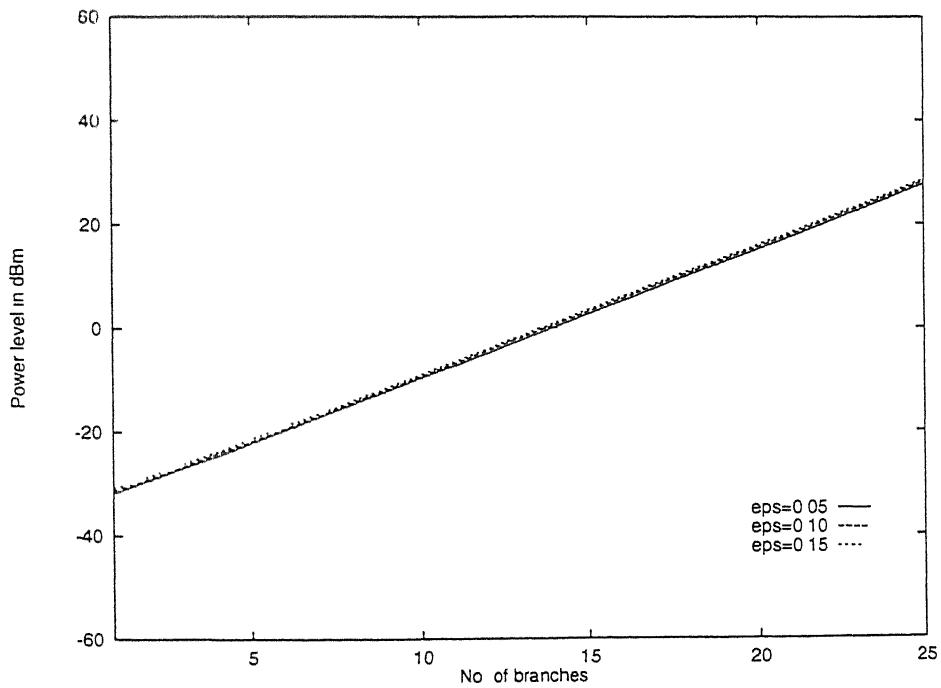


Figure 5.29: Variation of  $P_T$  Vs  $N$  with amplifier for  $n=32$

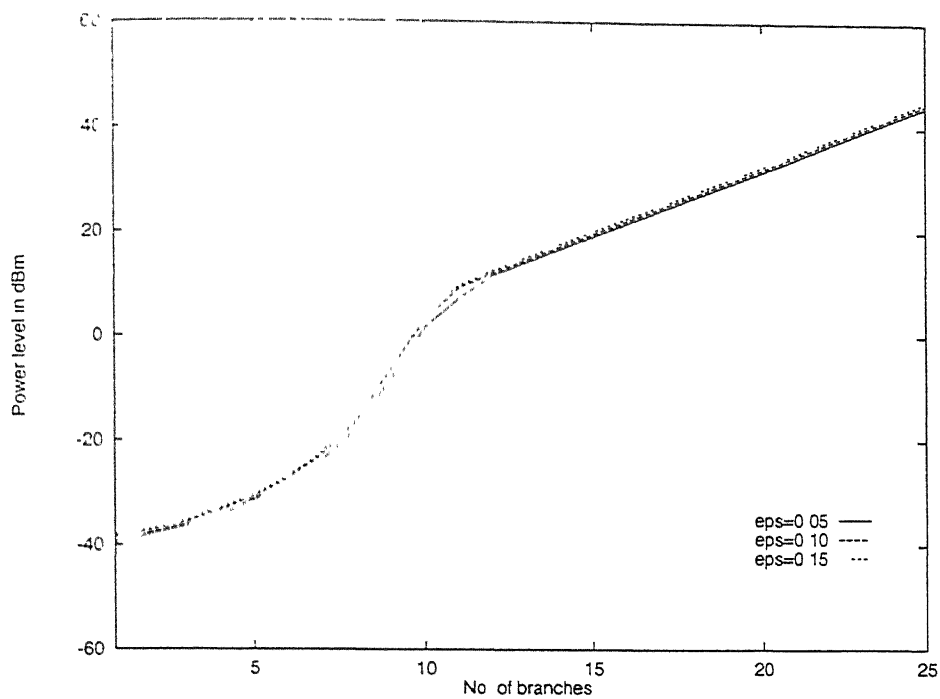


Figure 5.30. Variation of  $P_T$  Vs  $N$  with saturated amplifier for  $n=4$

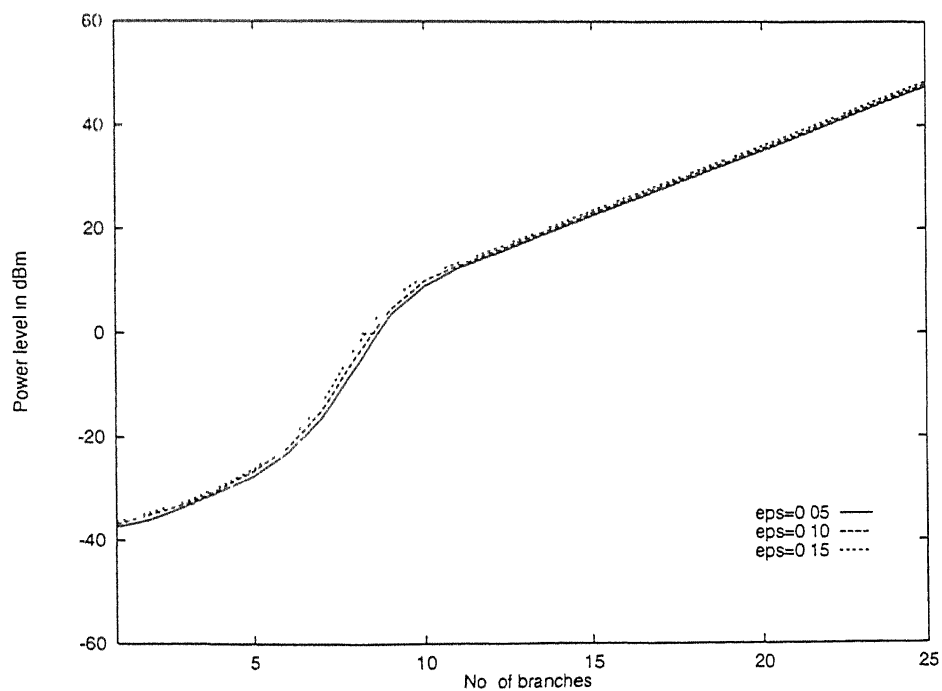


Figure 5.31: Variation of  $P_T$  Vs  $N$  with saturated amplifier for  $n=8$

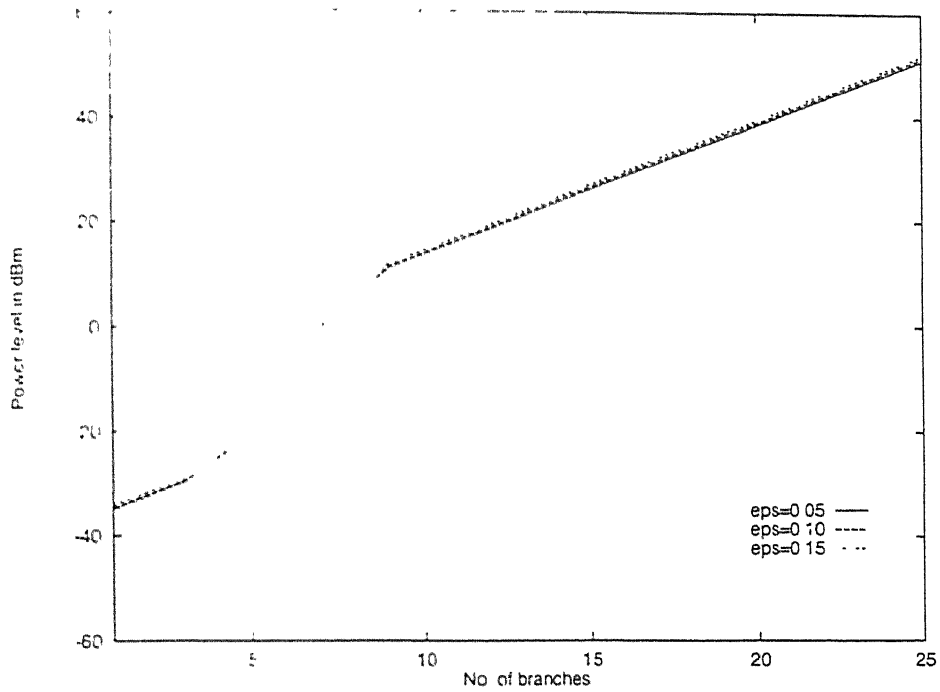


Figure 5 32: Variation of  $P_T$  Vs  $N$  with saturated amplifier for  $n=16$

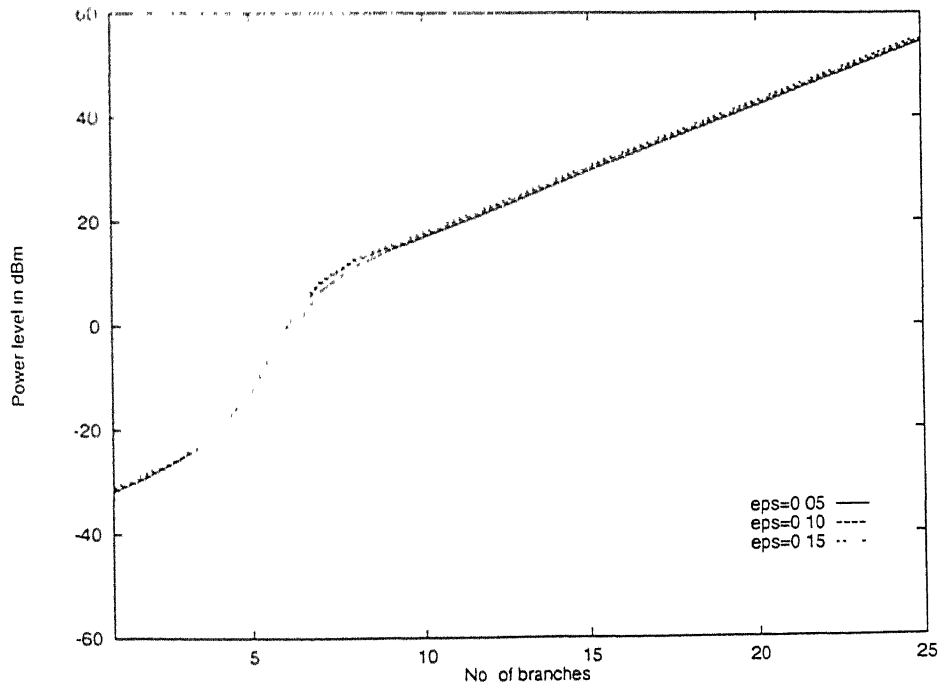


Figure 5 33: Variation of  $P_T$  Vs  $N$  with saturated amplifier for  $n=32$

# Chapter 6

## Conclusions

A new architecture of the subscriber access network was proposed. Before discussing the proposed network, already proposed networks and topologies were discussed from system upgradation point of view. In the new system architecture, the supportable number of users was computed. The incorporation of optical amplifiers in the network for increasing the capacity and the effect of gain saturation were analyzed. The effect of extinction ratio was also computed. From the foregoing discussions it is found that the proposed network can support large number of users for given number of amplifiers as compared to other networks. The system performance is degraded by the gain saturation effect of the amplifier but the supportable number of users is still high with respect to without amplifier case.

In this analysis, the crosstalk effect is not considered since the available components such as WDM, OADM and coupler are crosstalk free devices. Further, the system can be expanded to cover long distance and supports more users by placing the optical amplifiers at proper distance on the less. While doing so the total ASE noise contributed from each amplifier should be considered.

# Bibliography

- [1] Singh,Y.N., Jain,V.K.and Gupta,H.M., "*Semiconductor Optical amplifiers in WDM star networks*", *Proc Inst.Elect.Eng - Optoelectorn.*, year. April-1996, vol 143, no. 2, pp 144-152
- [2] Singh,Y.N . Jain,V.K. and Gupta,H.M, "*Semiconductor optical amplifiers in WDM Tree-Net.*" *IEEE J. Lightwave Technol.* year. 1997, vol 15, no. 2, pp 252-259
- [3] Green,P.E. "*Fiber optical Networks,*" *Prentice Hall* , year. 1993, Englewood Cliffs, NJ
- [4] Agrawal,G.P., "*Optical Communication Systems,*" *Wiley* , year 1992, NewYork
- [5] Olsson, N. A., "*Light wave Systems with Optical amplifiers,*" *J. Lightwave Technol*, year. July,1989, vol. LT-7, no. , pp 1071
- [6] John M Semor. "*Optical Fiber Communications.*" *Prentice Hall* , year. 1996,
- [7] Spirit,D.M and O 'Mahony,M.J., "*High Capacity Optical Transmission Explained,*" *Wiley* , year. 1995, New York, NJ
- [8] Yih-Kang, Maurice L in , Spears Dan R and Mih Yin, "*Fiber- Based Local Access Network Architectures,*" *IEEE Commun Mag*, year. Oct-1989, vol. , no. , pp
- [9] Wagner S.S. et al, "*Expermental demonstration of a passive optical subscriber loop architecture.*" *Electorn. Lett.*, year. Mar-1988, vol. 24, no. 6, pp 344-346

- [10] Farnham, A. and Farnham, A., "Local Loop Applications," *IEEE, J. Lightwave Technol.*, year: 1986, vol. LT-4, no. 1, pp 1741-1751
- [11] Khoe, G.D. and Farnham, A., "LTFOSS: An integrated subscriber system for direct and coherent detection," *IEEE, J. Lightwave Technol.*, year: July-1986, vol. LT-4, no. 7, pp 778-784
- [12] Stern, J.H. et al., "Passive optical local networks for telephony applications and beyond," *Electron. Lett.*, year: Nov. 1987, vol. 23, no. 24, pp 1255-1257
- [13] Wagner, S.S. and Robinson, J.H., "WDM Applications in Broad band Telecommunications Networks," *IEEE Commun. Mag.*, year: Mar-1989, vol. 27, no. 3, pp 22-30
- [14] Takashi Mizumachi, Tadayoshi Kitayama, Katsuhiko Shimizu, and Katsuyoshi Ito, "Interferometric crosstalk free optical Add-and-Drop multiplexer," *IEEE J. Lightwave Technol.*, year: Feb 1998, vol. 16, no. 2.
- [15] Yamada, H., Takachi, T., Inoue, Y., Okamoto, K. and Mitachi, S., "Low-crosstalk arrayed-waveguide grating multiplexers with phase compensating plate," *Electron. Lett.*, year: 1997, vol. 33, 1608-1609

**Date Slip**

126241

[illegible]

1  
 2  
 3  
 4  
 5  
 6  
 7  
 8  
 9  
 10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525

A126241